

# Getting Started Document for X1x MCAL Driver

Version.1.0.8

User's Manual

Target Device: RH850/P1x

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corp. without notice. Please review the latest information published by Renesas Electronics Corp. through various means, including the Renesas Electronics Corp. website (http://www.renesas.com).

Renesas Electronics

www.renesas.com

Rev.1.01 Feb 2017

#### Notice

- 1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
- 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other disputes involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawing, chart, program, algorithm, application examples.
- 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others
- 4. You shall not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics products.
- 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
  - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.
  - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (space and undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.

- 6. When using the Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat radiation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions or failure or accident arising out of the use of Renesas Electronics products beyond such specified ranges.
- 7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please ensure to implement safety measures to guard them against the possibility of bodily injury, injury or damage caused by fire, and social damage in the event of failure or malfunction of Renesas Electronics products, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures by your own responsibility as warranty for your products/system. Because the evaluation of microcomputer software alone is very difficult and not practical, please evaluate the safety of the final products or systems manufactured by you.
- 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please investigate applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive carefully and sufficiently and use Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall not use Renesas Electronics products or technologies for (1) any purpose relating to the development, design, manufacture, use, stockpiling, etc., of weapons of mass destruction, such as nuclear weapons, chemical weapons, or biological weapons, or missiles (including unmanned aerial vehicles (UAVs)) for delivering such weapons, (2) any purpose relating to the development, design, manufacture, or use of conventional weapons, or (3) any other purpose of disturbing international peace and security, and you shall not sell, export, lease, transfer, or release Renesas Electronics products or technologies to any third party whether directly or indirectly with knowledge or reason to know that the third party or any other party will engage in the activities described above. When exporting, selling, transferring, etc., Renesas Electronics products or technologies, you shall comply with any applicable export control laws and regulations promulgated and administered by the governments of the countries asserting jurisdiction over the parties or transactions.
- 10. Please acknowledge and agree that you shall bear all the losses and damages which are incurred from the misuse or violation of the terms and conditions described in this document, including this notice, and hold Renesas Electronics harmless, if such misuse or violation results from your resale or making Renesas Electronics products available any third party.
- 11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics

3

### **Abbreviations and Acronyms**

Abbreviation / Acronym	Description
ARXML/arxml	AUTOSAR xml
AUTOSAR	Automotive Open System Architecture
BSWMDT	Basic Software Module Description Template
<msn></msn>	Module Short Name
ECU	Electronic Control Unit
GUI	Graphical User Interface
MB	Mega Bytes
MHz	Mega Hertz
RAM	Random Access Memory
xml/XML	eXtensible Markup Language
<micro_variant></micro_variant>	F1x, R1x, P1x, E1x etc.
<micro_sub_variant></micro_sub_variant>	F1L,F1M,F1H, R1L, P1L,P1M, E1L, E1MS etc.
AUTOSAR_VERSION	3.2.2 or 4.0.3
DEVICE_NAME	Example :701205EAFP
RUCG	Renesas Unified Code Generator
.DLL	Dynamic Linking Library

### **Definitions**

Terminology	Description	
.xml	XML File.	
.arxml	AUTOSAR XML File.	
.trxml	Translation XML File.	
ECU Configuration Parameter Definition File	The ECU Configuration Parameter Definition is of type XML, which contains the definition for AUTOSAR software components i.e. definitions for Modules, Containers and Parameters. The format of the XML File will be compliant with AUTOSAR ECU specification standards.	
ECU Configuration Description File	The ECU Configuration Description file in XML format, which contains the configured values for Parameters, Containers and Modules. ECU Configuration Description XML File format will be compliant with the AUTOSAR ECU specification standards.	
BSWMDT File	The BSWMDT File in XML format, which is the template for the Basic Software Module Description. BSWMDT File format will be compliant with the AUTOSAR BSWMDT specification standards.	
Translation XML File	Translation XML File is in XML format, which contains translation and device specific header file path.	
Configuration XML File	Configuration XML File is in XML format, which contains command line options and options for input/output file path.	

### **Table of Contents**

Cha	pter 1 Introduction	11
Cha	pter 2 Generation Tool	13
2.1.	Translation XML File	
	2.1.1. Translation Header File	14
	2.1.2. Device Specific Header File	
2.2.	Configuration XML File	14
2.3.	Usage	15
2.4.	Sample Usage	16
2.5.	Tool Installation Requirements	18
	2.5.1. Hardware Requirements	
	2.5.2. Software Requirements	
2.6.	2.5.3. Limitations  Tool Installation	
2.0.		
	2.6.1. Pre Requisite	
2.7.	Tool Un-Installation	
2.8.	Common Messages	19
	2.8.1. Error Messages	19
	2.8.2. Warning Messages	
	2.8.3. Information Messages	
2.9.	R3.2.2 Messages	
	2.9.1. Error Messages	
	2.9.3. Information Messages	
2.10.	R4.0.3 Messages	
	2.10.1. Error Messages	
	2.10.2. Warning Messages	
2.11.	2.10.3. Information Messages  BSWMDT File	
2.11.	DOWNIDT FILE	23
Cha	pter 3 Application Example	27
3.1.	Folder Structure	27
3.2.	Makefile Description	27
	3.2.1. App_ <msn>_<variant>_Sample.mak</variant></msn>	
3.3.	Integrating The <msn> Driver Component With Other Components</msn>	33
3.4.	Building The <msn> Driver Component</msn>	34
	3.4.1. Targets Supported By The Sample Base Makefile	35
Cha	pter 4 Support For Different Interrupt Categories	37
Cha	pter 5 GNU MAKE Environment	39
5.1.	Build Process With GNUMAKE	
5.2.	Build Process Without GNUMAKE	39

Cha	pter 6	Load Binaries	43
Cha	pter 7	Appendix	45
7.1.	Translat	ion XML File	45
7.2.	Configura	ation XML File	45

### **List of Figures**

Figure 2-1	Generation Tool Overview	13
	List of Tables	
Table 2-1	Options and Description	15
Table 2-2	Mandatory Parameters	
Table 2-3	Mandatory Parameters	25
Table 4-1	CAT1 and CAT2 Naming Convention	
Table 4-2	List of ISR Names that need to be configured and published in Os.h	
	the interrupt vector table (CAT1) for <msn> Driver</msn>	38

Introduction Chapter 1

### **Chapter 1** Introduction

The document describes the information Generation Tool and references to Sections in the Component User Manuals that the user needs to refer to build the executable.

Generation Tool is a command line tool that accepts ECU Configuration Description File(s), BSWMDT File, Translation XML File and Configuration XML File as input and generates the C source and header files based on the configuration of the module.

Chapter 1 Introduction

### **Chapter 2** Generation Tool

Generation Tool is a command line tool that provides scalability and configurability for the component. It accepts ECU Configuration Description File(s), BSWMDT File, Translation XML File and Configuration XML File as input and generates the C Header and C Source files. However, Configuration XML File is optional.

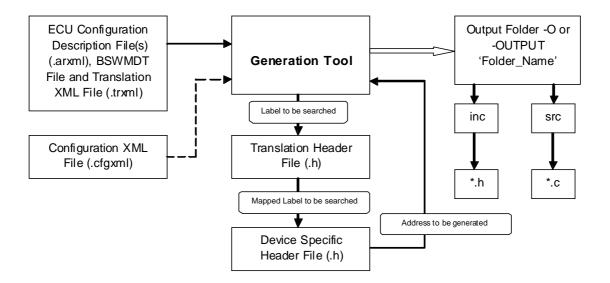


Figure 2-1 Generation Tool Overview

### 2.1. Translation XML File

Generation Tool accepts ECU Configuration Description File(s) (.arxml), BSWMDT File (.arxml) and Translation XML File (.trxml) as an input. Translation XML File is in XML format, which contains translation and device specific header file path. For the syntax of the contents of Translation XML File, please refer the Chapter 8 *Appendix*.

If mapped device specific address label is changed/updated then only respective mapping in Translation Header File needs to be updated. In this case, there will not be any impact on Generation Tool for the generation of address in tool generated output file(s).

#### 2.1.1. Translation Header File

This file is look-up table (mapping in the form of definitions) for the device specific address labels. Based on the configuration in ECU Configuration Description File, the mapped device specific address labels will be searched in Device Specific Header File by Generation Tool to generate associated address in tool generated output file(s). For the Translation Header File path, the value of '<Msn>DeviceName' parameter from the container '<Msn>General' container should be present as child tag of TRANSLATION-FILE-PATH in Translation XML File. Both 'Absolute' and 'Relative' paths are supported by generation tool however default path is 'Relative' path.

E.g.

<TRANSLATION-FILE-PATH>

<Value\_Of\_MsnDeviceName>..\DF\_Timer.h
..\DF\_Timer\_ISR.h/ Value\_Of\_MsnDeviceName>

</TRANSLATION-FILE-PATH>

### 2.1.2. Device Specific Header File

This file contains device specific labels and associated address. Based on the configuration in ECU Configuration Description File, the mapped device specific address labels will be used to generate associated address in tool generated output file(s). For the Device Specific Header File path, the value of '<Msn>DeviceName' parameter from the container '<Msn>General' container should be present as child tag of DEVICE-FILE-PATH in Translation XML File. Both 'Absolute' and 'Relative' paths are supported by generation tool however default path is 'Relative' path.

If multiple Device Specific Header Files need to be provided for the same device (value of '<Msn>DeviceName' parameter) in Translation XML File, then each Device Specific Header File path should be separated with 'space'.

E.g.

<DEVICE-FILE-PATH>

<Value\_Of\_MsnDeviceName>..\DF\_Timer.h ..\DF\_Timer\_ISR.h/
Value\_Of\_MsnDeviceName>

</DEVICE-FILE-PATH>

Remark Generation Tool will searches the mapped labels in Device Specific Header File by using Translation Header File for the respective address generation in tool generated output file(s).

### 2.2. Configuration XML File

Configuration XML File is in XML format which contains command line options and input/output path. For the syntax of the contents of Configuration XML File, please refer the Chapter 8 *Appendix*.

E.g. <LOG>ON/OFF</LOG> <HELP>ON/OFF</HELP>

### 2.3. Usage

This section provides the information regarding usage of the Generation Tool. It also provides the syntax of the command line arguments (input filenames and options).

Generation Tool executable is invoked as shown below.

### RUCG.exe <DLL Path> [<Options>] {<Input Filename>}

Where,

RUCG.exe: RUCG Tool Executable DLL Path: Module specific DLL file path

Options: [-H/-Help -C/-Config -O/-Output -Osrc -Oinc -L/-Log -D/-Dryrun]

Input Filename(s): {ECU Configuration Description File(s), BSWMDT File and

Translation XML File [optional]}

#### **Notations:**

{data} represents compulsory data

<data> represents the actual data that will be specified on command line during tool usage.

[data] represents optional data.

Table 2-1 Options and Description

Option	Description
-H/-Help	To display help regarding usage of the tool. Gets the highest priority when used with other options.
-C/-Config	To execute tool with the options provided in the Configuration XML File. Command line options get the higher priority than the options provided in Configuration XML File.

Table 2-1 Options and Description

Option	Description	
-O/-Output	By default, the tool generates output files in the ' <component_name>_Output' folder in the path where executable is present. The user can use the -O option followed by the folder name, to generate the output files in the specified folder. Either absolute path or relative path can be provided to specify the folder name. The C Source and C Header files are generated in the sub folders 'src' and 'inc' within the output folder.</component_name>	
-Osrc	The user can use the -Osrc option followed by the folder name, to generate the C Source files in the specified folder.	
-Oinc	The user can use the -Oinc option followed by the folder name, to generate the C Header files in the specified folder.	
–L/-Log	To log the output to the <component_name>.log file.</component_name>	
-D/-Dryrun	To execute tool in validation mode. The tool will not generate output files even though the input file provided is error free.	

#### Remark

- If Translation XML File is not provided on the command line then '<Component\_Name>\_X1x.trxml', which is present in the same location of The Generation Tool considers <Component\_Name> \_X1x.dll as 'default' Translation XML File.
- If Configuration XML File is not provided on the command line then '<Component\_Name>\_X1x.cfgxml', which is present in the same location of '<Component\_Name>\_X1x.dll' is considered as 'default' Configuration XML File by the Generation Tool.
- The Generation Tool should not be executed more than five times in parallel

### 2.4. Sample Usage

Sample usage of the generation tool is given below. "<Msn>\_X1x.dll" is taken as example. Similar usage is applicable for other MCAL Generation Tools, where <Msn>\_X1x.dll is in DLL Path.

#### RUCG.exe < DLL Path>

<Msn> Driver Generation Tool usage is displayed on the terminal. Generation Tool accepts Configuration XML File as default and performs the execution, based on the settings provided in Configuration XML File.

### RUCG.exe < DLL Path > -H

Displays <MSN> Driver Generation Tool help information on the terminal, where <MSN> Driver Generation Tool executable is present.

#### RUCG.exe <DLL Path> -L -O output Sample.arxml BSWMDT.arxml

Generation Tool logs the output to the <Msn>.log file. <Msn>\_PBcfg.c file is generated in 'src' folder. <Msn>\_Cfg.h file is generated in 'include' folder.

#### RUCG.exe < DLL Path> -D Sample.arxml BswMd.arxml

Generation Tool validates an input file and displays error/warning/information messages if any on the command line. Output files are not generated since –D option is provided in the command line.

#### RUCG.exe < DLL Path> -O output Sample.arxml BswMd.arxml

Output files are generated in folder "output". <Msn>\_PBcfg.c is generated in 'src' folder. <Msn>\_Cfg.h file is generated in 'inc' folder.

### RUCG.exe <DLL Path> C:\Input\Sample.arxml C:\Input\BswMd.arxml -O output

Generation Tool accepts input file (Sample.arxml) from absolute directory path "C:\Input". Output files are generated in folder "output". <Msn>\_PBcfg.c is generated in 'src' folder. <Msn>\_Cfg.h file is generated in 'inc' folder.

### RUCG.exe < DLL Path > Sample.arxml BswMd.arxml - O C:\Output

Output files are generated in folder "C:\Output". <Msn>\_PBcfg.c is generated in 'src' folder. <Msn> Cfg.h file is generated in 'inc' folder.

### RUCG.exe < DLL Path > Sample.arxml BswMd.arxml Sample.trxml

Generation Tool accepts ECU Configuration Description File (Sample.arxml), BSWMDT File (BswMd.arxml) and Translation XML File (Sample.trxml) from the current working directory. Output files are generated in the default folder "<Msn>\_Output", since –O option is not provided in the command line. <Msn>\_PBcfg.c is generated in 'src' folder. <Msn>\_Cfg.h file is generated in 'inc' folder.

### RUCG.exe < DLL Path > - C Sample.cfgxml

Generation Tool accepts ECU Configuration Description File (Sample.arxml), BSWMDT File (BswMd.arxml) and Configuration XML File (Sample.cfgxml) from the current working directory. Tool accepts options provided in the Configuration XML File. If Configuration XML File name is not provided as input with -C option, Generation Tool errors out.

#### Remark

- If Translation XML File is not provided on the command line,
   <Msn>\_X1x.dll considers <Msn>\_X1x.trxml as 'default' Translation XML File from the same directory where the tool is located.
- If Configuration XML File is not provided on the command line,
   <Msn>\_X1x.dll considers <Msn>\_X1x.cfgxml as 'default' Configuration XML File from the same directory where the tool is located.
- If any filename/directory name related argument on the command line contain the 'space', then the same argument on the command line should be provided in double quotes "" as followed by standard command line feature. E.g. if file name is 'Sample Description.arxml', then on the command line the same name should be provided in double quotes "" as "Sample Description.arxml".
- The 'include' and 'src' directories are generated inside the output directory

provided on the command line or in the default output directory <Msn>\_Output.

 BSWMDT file should not be updated manually since it is "Static Configuration" file.

### 2.5. Tool Installation Requirements

The minimum hardware and software requirements for proper installation of Module Specific Generation Tool are listed below. This ensures optimal performance of the Tool.

### 2.5.1. Hardware Requirements

Processor Pentium/equivalent processor @ 500 MHz or greater

**Memory** RAM 64MB or greater

Hard Disk Drive 500 MB or greater storage capacity

### 2.5.2. Software Requirements

Operating System Microsoft Windows Platform

### 2.5.3. Limitations

Command Line characters are limited to 128 depending upon the operating system.

### 2.6. Tool Installation

The installation procedure of Module Specific Generation Tool is provided in the section below.

### 2.6.1. Pre Requisite

Module Specific Generation Tool executable runs on Windows platforms only.

### 2.6.2. Installation Steps

Copy the Module Specific Generation Tool executable file to the local hard disk.

Run the executable with -H option to get help on usage of the tool.

RUCG.exe < DLL Path> -H

This command generates usage of Module Specific Driver Generation Tool on the command line.

### 2.7. Tool Un-Installation

There is no specific method for un-installing the Module specific Generation Tool. To un-install, delete the Module specific Generation Tool executable from the existing directory.

### 2.8. Common Messages

This section contains the list of error/warning/information messages which is common for AUTOSAR Renesas R3.2.2 and R4.0.3 X1x MCAL Driver module that will be generated by the Generation Tool.

### 2.8.1. Error Messages

ERR000001: File <File\_Name> does not exist.

This error occurs, if the input <File\_Name> is not found.

ERR000002: Name of the Generation Tool Configuration XML File is not given along with <-C/-CONFIG> option.

This error occurs, if the name of the Generation Tool Configuration XML File is not given along with <-C/-CONFIG> option.

### ERR000003: File <File name> is not as per XML standard.

This error will occur, if the input <File name> is not as per XML standard.

#### ERR000004: Cannot open the <Log file name> file.

This error will occur, if unable to open the <Log file name> file.

### ERR000005: Name of output directory is not given along with <-O/-OUTPUT> option.

This error will occur, if the output directory name is not given along with <-O/-OUTPUT> option.

### ERR000006: Name of output directory is not given in OUTPUT-PATH tag in <File name>.

This error will occur, if the output directory is not given in OUTPUT-PATH tag in configuration file.

#### **ERR000007: The Generation Tool expects inputs.**

This error will occur, if the no option is provided in the command line and none of the option in the configuration file is set.

# ERR000008: The option <option> is not supported by the Generation Tool. The Generation Tool supports <-O/-OUTPUT, -Osrc, -Oinc, -H/-HELP, -L/-LOG, -C/-CONFIGFILE and -D/-DRYRUN>"options.

This error will occur, if the invalid <option> is provided to the tool.

### ERR000009: Invalid output directory name < output directory name > as the file with same name exists.

This error will occur, if the <output directory name> already exists.

### ERR000010: Invalid output directory name <output directory name> Directory name should not contain any of \\*\?\"\|\: characters.

This error will occur, if the <output directory name> path contains junk character.

### ERR000011: ECU Configuration Description File is not provided as input to the Generation Tool.

This error will occur, if the ECU Configuration Description File is not given in the command line or in configuration file.

### ERR000012: The input <File name> is not as per XML standard. Provide the ECU Configuration Description File as input on the command line.

This error will occur, if the ECU Configuration Description File is not as per XML standard.

### ERR000013: <File name> should contain the TRANSLATION-FILE-PATH' and 'DEVICE-FILE-PATH' tags.

This error will occur, if the translation <File name> doesn't have 'TRANSLATION-FILE-PATH' and 'DEVICE-FILE-PATH' tags.

#### ERR000014: 'TRANSLATION-FILE-PATH' tag in <File name> is empty.

This error will occur, if the translation <File name> does not have 'TRANSLATION-FILE-PATH' tags.

### ERR000015: The 'device\_name' tag should be present as child of 'TRANSLATION-FILE-PATH" tag in <File name>.

This error will occur, if the device mentioned in ECU Configuration Description File is not present in

'TRANSLATION-FILE-PATH' tag in the <File name>.

#### ERR000016: 'DEVICE-FILE-PATH' tag in <File name> is empty.

This error will occur, if the translation file <File name> does not have 'DEVICE- FILE-PATH' tags.

### ERR000017: The 'device\_name' tag should be present as child of 'DEVICE-FILE-PATH' tag in <File name>.

This error will occur, if the device mentioned in ECU Configuration Description File is not present in

'DEVICE-FILE-PATH' tag.

#### ERR000018: Cannot create directory <output directory name>.

This error will occur, if unable to create output directory <output directory name>.

#### ERR000019: Cannot open <File name>.

This error will occur, if unable to open <File name>.

### ERR000020: The macro label <macro label> should be unique in <translation file name> translation C Header File.

This error will occur, if macro label is not unique in translation C Header File.

# ERR000021: The macro definition for <macro label> macro is not found in <translation file name> translation C Header File. The macro label format should be <label format>.

This error will occur, if macro definition is not found in translation C Header File.

### ERR000022: The macro value for <macro label> macro is empty in <translation file name> translation C Header File.

This error will occur, if macro label value is empty in translation C Header File.

### ERR000023: The macro definition for <macro value> macro is not found in input device specific C Header File(s).

This error will occur, if macro definition is not found in input device specific C Header File(s).

### ERR000024: The macro value for <macro value> macro is empty in input device specific C Header File(s).

This error will occur, if macro value is empty in input device specific C Header File(s).

### ERR000025: Path < Configured Reference Path > provided for Bsw Module is incorrect.

This error will occur, if the reference provided for Bsw Module Component is incorrect.

### ERR000026: BSWMDT content is not present in the input file(s) for '<Module Name>' module.

This error will occur, if the module specific BSWMDT content is not present in the input files.

### ERR000027: <MSN> BSWMDT File of either AUTOSAR R3.2 or R4.0 should be given as input.

This error will occur, if the both R3.2 and R4.0 BSWMDT file given to the input to the generation tool.

### ERR000028: 'MODULE-DESCRIPTION-REF' element should be present in the description file of '<Module Name>' module.

This error will occur, if the MODULE-DESCRIPTION-REF element is not present module specific description file.

### ERR000029: AUTOSAR version of BSWMDT File and Module Description File is different.

This error will occur, if the AUTOSAR version of the BSWMDT File and module description file is different.

#### ERR000031: <'<Drive name>':\> Drive does not exist.

This error will occur when output drive does not exist.

### ERR000032: File extension is not as per AUTOSAR ECU Configuration Description File naming convention for '<File path>' file.

This error will occur if supporting file extensions are not as per AUTOSAR ECU Configuration Description File naming standard.

### 2.8.2. Warning Messages

None.

### 2.8.3. Information Messages

#### INF000001: Tool Version:

This is to display Tool Version for each execution of the tool.

#### **INF000002: Command line arguments:**

This is to display the command line arguments for each execution of the tool.

#### INF000003: The valid inputs are provided below.

This information will occur, if the command line option is not given.

#### INF000004: Opened file <filename> at <time>.

This information will occur, during opening the file.

#### INF000005: Error(s) and Warning(s) detected.

This information will display the number of errors and warnings.

### INF000006: Execution completed successfully.

This information will occur, if the execution completed successfully.

#### INF000007: Execution completed successfully with warnings.

This information will occur, if the execution completed successfully with warnings.

#### INF000008: Execution terminated due to command line errors.

This information will occur, if the execution terminated due to command line errors.

#### INF000009: Execution terminated due to error in the input file.

This information will occur, if the execution terminated due to error in the input file.

### INF000010: Execution terminated due to error, during the structure generation in the output file.

This information will occur, if the execution terminated during structure generation in output file.

### 2.9. **R3.2.2 Messages**

This section contains the list of error/warning/information messages, which is specific to AUTOSAR Renesas R3.2.2 X1x MCAL Driver module that will be generated by the Generation Tool.

### 2.9.1. Error Messages

ERR000030: The 'parameter tag name' tag should be configured in BSWMDT File.

This error will occur, if any of the configuration parameter(s) mentioned below is (are) not configured in BSWMDT File.

The list of mandatory parameters with respect to container is listed below:

Table 2-2 Mandatory Parameters

Container	Parameters
BswImplementation	SW-MAJOR-VERSION
	SW-MINOR-VERSION
	SW-PATCH-VERSION
	AR-MAJOR-VERSION
	AR-MINOR-VERSION
	AR-PATCH-VERSION
	VendorApiInfix
BswModuleDescription	Moduleld

Note: VendorApilnfix parameter is mandatory for only some modules.

### 2.9.2. Warning Messages

None.

### 2.9.3. Information Messages

None.

### 2.10. R4.0.3 Messages

This section contains the list of error/warning/information messages, which is specific to AUTOSAR Renesas R4.0.3 X1x MCAL Driver module that will be generated by the Generation Tool.

### 2.10.1. Error Messages

ERR000030: The 'parameter tag name' tag should be configured in BSWMDT File.

This error will occur, if any of the configuration parameter(s) mentioned below is (are) not configured in BSWMDT File.

The list of mandatory parameters with respect to container is listed below:

**Table 2-3 Mandatory Parameters** 

Container	Parameters
BswImplementation	SwVersion
	Vendorld
	ArReleaseVersion
	VendorApiInfix
BswModuleDescription	ModuleId

Note: VendorApiInfix parameter is mandatory for only some modules.

### 2.10.2. Warning Messages

None.

### 2.10.3. Information Messages

None.

### 2.11. BSWMDT File

The BSWMDT File is the template for the Basic Software Module Description. Module specific Generation Tool uses "Common Published Information" from module specific BSWMDT file. BSWMDT file should not be updated manually since it is "Static Configuration" file.

The required elements from BSWMDT File by module specific Generation Tool are as follows:

**BSW-MODULE-DESCRIPTION** 

MODULE-ID

### **BSW-IMPLEMENTATION**

- SW-VERSION
- VENDOR-ID
- AR-RELEASE-VERSION
- VENDOR-API-INFIX

In case of multiple driver support implementation, VENDOR-API-INFIX is mandatory. In case of single driver support implementation, VENDOR-API-INFIX is not used.

### **Chapter 3** Application Example

### 3.1. Folder Structure

Refer Section "Integration and Build Process" in the respective component User Manuals.

### 3.2. Makefile Description

Makefile is available in the folder "X1X\< MICRO\_VARIANT >\modules\<msn>\sample\_application\< MICRO\_SUB\_VARIANT >\make\<compiler>".

The Makefiles with the guidelines provided in AUTOSAR BSW Makefile Interface Specification, which enables easy integration with other components and the application.

The files is:

• App\_<Msn>\_<MICRO\_SUB\_VARIANT>\_<DEVICE\_NAME>Sample.mak (Contains the device specific instructions).

### 3.2.1. App\_<Msn>\_<variant>\_Sample.mak

# Get the project directory into variable "PROJECT\_ROOT"

```
PROJECT_ROOT = $(shell cd)\..\..\..\..\..
COMMON_SAMPLE_CORE_PATH =
$(PROJECT_ROOT)\$(MICRO_FAMILY)\common_platform
                  \modules\<Msn>\sample_application
# Get the current working directory into variable "SAMPLE_ROOT_PATH"
SAMPLE_ROOT_PATH =
$(PROJECT_ROOT)\$(MICRO_FAMILY)\$(MICRO_VARIANT)\modules
<Msn>\sample_application\$(MICRO_SUB_VARIANT)
# Get the current working directory into variable "STUBS"
STUBS PATH =
$(PROJECT_ROOT)\$(MICRO_FAMILY)
                  \common_platform\generic
                  \stubs\$(AUTOSAR VERSION)
# Get current configuration path
<MSN> CONFIG PATH =
$(SAMPLE_ROOT_PATH)\$(AUTOSAR_VERSION)
# Get TRXML path
TRXML_CONFIG_PATH = $(PROJECT_ROOT)
                      \$(MICRO_FAMILY)\$(MICRO_VARIANT)
                       \common_family\generator
# Get BSWMDT path
<MSN>_BSWMDT_CONFIG_PATH = $(PROJECT_ROOT)
                                \$(MICRO_FAMILY)
                                \$(MICRO_VARIANT)
                                \modules\<Msn>
                                \generator
# Get current configuration file path
<MSN>_CONFIG_FILE = $(MSN_CONFIG_PATH) \config
\App_<MSN>_$(MICRO_SUB_VARIANT)_
$(DEVICE_NAME)_Sample.arxml
# Path to TRXML Configuration File, which is required for this module
TRXML_CONFIG_FILE =
"$(TRXML_CONFIG_PATH)\Sample_Application_$(MICRO
_VARIANT).trxml""
# Path to ECUM Configuration File, which is required for this module
ECUM_CONFIG_PATH = $(STUBS_PATH)\EcuM
ECUM_CONFIG_FILE = "$(ECUM_CONFIG_PATH)\xml\EcuM_Msn.arxml"
```

```
# Path to TRXML Configuration File, which is required for Test Application
TRXML_CONFIG_FILE =
"$(TRXML_CONFIG_PATH)\Sample_Application_$(MICRO_VARIANT).trxml"
# Path to BSWMDT Configuration File, which is required for MSN Sample
Application
MSN_BSWMDT_CONFIG_FILE = "$(MSN_BSWMDT_CONFIG_PATH)\R403_$(MODULE_NAME)_$(MICRO_VARIANT)_BSWMDT.arxml
# Version check for inter modules required
MSN_VERSION_CHECK_REQ = yes
# Database to be linked together with the current application
# Define 'no' to isolate database from the application
<MSN>_DBASE_REQ = yes
# Get the name of the SRECORD file
CURRENT APPL SRECORD =
$(CURRENT_APPL)_$(MICRO_SUB_VARIANT)_Sample
# Name of the database if generated separately
<MSN>_DB = <Msn>_PBcfg
# Final executable
                                            #
EXE = $(CURRENT_APPL)_ MICRO_
<SUB_VARIANT>_Sample.$(EXE_FILE_SUFFIX)
LIBRARIES_TO_BUILD =
OBJECTS_LINK_ONLY =
OBJECT_OUTPUT_PATH = $(SAMPLE_ROOT_PATH)\obj\ghs
GENERATED_SOURCE_FILES =
CC_FILES_TO_BUILD =
CPP_FILES_TO_BUILD =
ASM_FILES_TO_BUILD =
CC_INCLUDE_PATH =
CPP_INCLUDE_PATH =
ASM_INCLUDE_PATH =
```

PREPROCESSOR\_DEFINES =

LIBRARIES\_LINK\_ONLY =

DIRECTORIES\_TO\_CREATE =

DEPEND\_GCC\_OPTS =

MAKE\_CLEAN\_RULES =

MAKE GENERATE RULES =

MAKE\_COMPILE\_RULES =

MAKE\_DEBUG\_RULES =

MAKE\_CONFIG\_RULES =

MAKE\_ADD\_RULES =

MAKE DEBUG RULES =

MAKE\_ CONFIG\_RULES =

MAKE\_ADD\_RULES =

MAKE\_DEBUG\_RULES += debug\_base\_make

STD LIBRARY =

LNKFILE =

\$(PROJECT\_ROOT)\\$(MICRO\_FAMILY)\\$(MICRO\_VARIANT)\modules\<msn >\sample\_application\\$(MICRO\_SUB\_VARIANT)\make\ghs\\$(CURRENT\_APP L)\_\$(MICRO\_SUB\_VARIANT)\_\$(DEVICE\_NAME)\_Sample.ld

LNKFILE DB =

\$(PROJECT\_ROOT)\\$(MICRO\_FAMILY)\\$(MICRO\_VARIANT)\modules\<ms n>\sample\_application\\$(MICRO\_SUB\_VARIANT)\make\ghs\\$(CURRENT\_A PPL)\_\$(MICRO\_SUB\_VARIANT)\_\$(DEVICE\_NAME)\_Sample\_db.ld

.PHONY: MAKE\_CLEAN\_RULES MAKE\_GENERATE\_RULES

MAKE\_COMPILE\_RULES \

MAKE\_DEBUG\_RULES MAKE\_CONFIG\_RULES MAKE\_ADD\_RULES

# Modules to be included in the project

#

#

include

\$(COMMON\_SAMPLE\_CORE\_PATH)\make\\$(CURRENT\_APPL)\_Common\_S ample\_Defs.mak

include

\$(COMMON\_SAMPLE\_CORE\_PATH)\make\\$(CURRENT\_APPL)\_Common\_S

ample\_rules.mak

```
SAMPLE_CORE_PATH = $(SAMPLE_ROOT_PATH)
include
$(SAMPLE CORE PATH)\make\$(CURRENT APPL
_$(MICRO_SUB_VARIANT)_Sample_defs.mak
include
$(SAMPLE_CORE_PATH)\make\$(CURRENT_APPL
_$(MICRO_SUB_VARIANT)_Sample_rules.mak
# DET Module Core Path
#DET_CORE_PATH = $(STUBS_PATH)\Det
#include $(DET_CORE_PATH)\make\det_defs.mak
#include $(DET_CORE_PATH)\make\det_rules.mak
# OS Module Core Path
OS_CORE_PATH = $(STUBS_PATH)\os
include $(OS_CORE_PATH)\make\os_defs.mak
include $(OS_CORE_PATH)\make\ os_rules.mak
# ECUM Module Core Path
"ECUM_CORE_PATH = $(STUBS_PATH)\EcuM include $(ECUM_CORE_PATH)\make\ecum_defs.mak include $(ECUM_CORE_PATH)\make\ecum_rules.mak
# Scheduler Manager Module Core Path
#
Ifeq ($(AUTOSAR VERSION), 3.2.2)
SCHM CORE PATH = $(STUBS PATH)\SchM
include $(SCHM_CORE_PATH)\make\schm_defs.mak
RTE CORE PATH = $(STUBS PATH)\SchM
include $(RTE_CORE_PATH)\make\rte_defs.mak
endif
```

```
# <MSN> Driver Component
#
<MSN>_CORE_PATH =
$(PROJECT_ROOT \$(MICRO_FAMILY)\ common_platform
\modules\<msn>
include $(<MSN>_CORE_PATH)\make\renesas_<msn>_defs.mak
include $(<MSN>_CORE_PATH)\make\renesas _<msn>_check.mak
include $(<MSN>_CORE_PATH)\make\renesas_<msn>_rules.mak
# Command to generate standalone database
$(MSN DB).$(S RECORD SUFFIX):$(MSN DB).$(OBJ FILE SUFFIX)
$(LNKFILE DB)
                ****************
@echo
@echo Building the standalone database ...
$(DBLINKER) $(LNKFILE_DB) \
"$(OBJECT_OUTPUT_PATH)\$(ICU_DB).$(OBJ_FILE_SUFFIX)" \
-map="$(OBJECT_OUTPUT_PATH)\$(ICU_DB).$(MAP_FILE_SUFFIX)" \
-o "$(OBJECT_OUTPUT_PATH)\$(MSN_DB).$(EXE_FILE_SUFFIX)"
@echo Generating Motorola S-Record file...
$(CONVERTER) $(SFLAGS)
"$(OBJECT_OUTPUT_PATH)\$(ICU_DB).$(EXE_FILE_SUFFIX)" \
-o "$(OBJECT_OUTPUT_PATH)\$(ICU_DB).$(S_RECORD_SUFFIX)"
@echo Done ...
#####################
$(<MSN>_DB).$(S_RECORD_SUFFIX):$(<MSN>_DB).$(OBJ_FILE_SUFFIX)
) $(LNKFILE DB)
@echo Building the standalone database ...
$(DBLINKER) $(LNKFILE_DB) \
"$(OBJECT_OUTPUT_PATH)\$(<MSN>_DB).$(OBJ_FILE_SUFFIX)" \
-map="$(OBJECT OUTPUT PATH)\$(<MSN> DB).$(MAP FILE SUFFIX)" \
-o "$(OBJECT_OUTPUT_PATH)\$(<MSN>_DB).$(EXE_FILE_SUFFIX)"
@echo Generating Motorola S-Record file...
$(CONVERTER) $(SFLAGS)
"$(OBJECT OUTPUT PATH)\$(<MSN> DB).$(EXE FILE SUFFIX)" \
-o "$(OBJECT_OUTPUT_PATH)\$(<MSN>_DB).$(S_RECORD_SUFFIX)"
@echo Done ...
```

## 3.3. Integrating The <MSN> Driver Component with Other Components

This section explains the procedure to integrate the <MSN>Driver Component with other BSW components and the application.

Depending on the various configurations, the following modules are required to be integrated with the <MSN>Driver Component:

- <MSN>Interface (Folder 'Sample\_Application' where the sample application for <MSN> exists. The variable '<MSN>\_CORE\_PATH' and the corresponding module Makefile names must be suitably changed in the base Makefile)
- Development Error Tracer (Folder 'Det' where the DET module files exist.
  The variable 'DET\_CORE\_PATH' and the corresponding module
  Makefile names must be suitably changed in the base Makefile)
- Scheduler Manager (Folder 'SchM' where the SCHM module exists.
   The variable 'RTE\_CORE\_PATH' and the corresponding module
   Makefile names must be suitably changed in the base Makefile)
- MCU Interface (Folder 'Mcu' in the give example. The variables 'MCU\_CONFIG\_PATH' and 'MCU\_CONFIG\_FILE' must be suitably changed in the module Makefile (Software\_Source\_Code\ssc\mak\renesas\_<MSN>\_rules.mak) and the base Makefile).

All the above folders are given only as examples and they have to be replaced with actual component folders. It is assumed that every component has the corresponding module Makefiles.

Apart from the above BSW components, few other folders are provided as mentioned below:

- AUTOSAR Type definition Files (Folder 'common\include', where the header files containing standard definitions that are common to all components are placed. The variable 'STUB\_CORE\_PATH' and the corresponding module Makefile names must be suitably changed in the base Makefile)
- RH850 specific Files (Folder 'X1X\common\_platform\generic\include', where
  the header files that are common to all components but specific to Renesas
  V850 microcontroller are placed. The variable '
  GENERIC\_PLATFORM\_PATH' and the corresponding module Makefile
  names must be suitably changed in the base Makefile)

Compiler specific Files (Folder 'compiler', where the header files that are common to all components but specific to GreenHills Compiler are placed. The variable 'COMPILER\_PATH' and the corresponding module Makefile

names must be suitably changed in the base Makefile).

### 3.4. Building the <MSN> Driver Component

This section explains the procedure to build the <MSN>Driver Component for any given configuration.

The <MSN> Driver Configuration Description file (.arxml) has to be given as input to the <MSN> Driver Generation Tool. The tool generates output files namely <Msn>\_Lcfg.c, <Msn>\_PBcfg.c, <Msn>\_Cbk.h and <Msn>\_Cfg.h.

### Following variables must be defined in the base Makefile described in Section 5.2.1 (Makefile Description)

- PROJECT\_ROOT: Root directory where the projects for all components exist.
- SPECIFIC\_APPL\_ROOT\_PATH: Directory where the <MSN> sample application exists.
- OBJECT\_OUTPUT\_PATH: Directory where the module specific output files are generated.
- STARTUP\_<family>\_CORE\_PATH: Core path for the variant specific startup files exist.
- STUB\_CORE\_PATH: Core path for the stub files exist.
- COMPILER\_PATH: Directory where the compiler files exist.
- DEVICE\_FILE\_PATH: Directory where the device files exists.
- MSN\_CORE\_PATH: Core path for the <MSN> Driver Component folder.
- MSN\_TOOL\_PATH: Directory where the module specific tool exe exist.
- CC\_INCLUDE\_PATH: Path variable where all the header files can be found by the compiler.
- CC\_FILES\_TO\_BUILD: Variable that contains the list of source files, to be compiled and linked.
- <MSN>\_clean\_generated\_files: This target can be used to clean the configuration source and header files generated by the <MSN> Driver Generation Tool.
- debug\_<MSN>\_makefile: This target can be used to print the debug information such as paths used by <MSN> Driver Component.
- generate\_<MSN>\_config: This target can be used to invoke the <MSN> Driver Generation Tool, which in turn takes the ECU Configuration Description files (App\_<MSN>\_<DEVICE\_NAME>\_Sample.arxml) as an input and generates the configuration source and header files.

### Following variables must be defined in the Module Makefile described in Section 5.2.1 (Makefile Description):

- PROJECT\_ROOT: Root directory where the projects for all components exist.
- MSN\_CONFIG\_PATH: Configuration path for description file of the <MSN> Driver Component.

- MSN\_CONFIG\_FILE: Name of the <MSN> Driver Component description file.
- STUB\_CONFIG\_PATH: Configuration path for description file of the stub.
- MCU\_CONFIG\_FILE: Name of the MCU Driver Component description file.
- TRXML\_CONFIG\_PATH: TRXML Configuration file path used for the <MSN> Driver Component.
- TRXML\_CONFIG\_FILE: TRXML Configuration file used for the <MSN> Driver Component.
- BSWMDT\_CONFIG\_PATH: Path for <MSN> BSWMDT file.
- BSWMDT\_CONFIG\_FILE: Name of the <MSN> BSWMDT file.
- GENERIC\_STUB\_PATH: Directory where the generic stub exist.
- GENERIC\_PLATFORM\_PATH: Directory where the generic platform files exist.
- CC\_INCLUDE\_PATH: Path variable where all the header files can be found by the compiler.
- CC\_FILES\_TO\_BUILD: Variable that contains the list of source files, to be compiled and linked.
- <MSN>\_DB: Name of the Post-build configuration file.

The above-mentioned variables are to be used to build the base Makefile.

A sample base Makefile (App\_<MSN>\_ <MICRO\_SUB\_VARIANT> \_Device\_Sample.mak) has been provided with the product for reference. This file can be modified to suit the developer's needs.

The targets that are supported in the base Makefile enable the user in build and cleanup activities during/after the build process. They are listed below:

### 3.4.1. Targets Supported By the Sample Base Makefile

#### 3.4.1.1. debug\_base\_make

Invoking the Make utility and passing "debug\_base\_make" as a parameter prints all the variables that are used in the base Makefile. This can be used to print various paths and file names to see if they are correct.

#### 3.4.1.2. clean objs

Invoking the Make utility and passing "clean\_objs" as a parameter deletes all the object files from the output folder ("X1X\<MICRO\_VARIANT>\modules\<msn>\Sample\_application\< MICRO\_SUB\_VARIANT >\obj" in this case).

### 3.4.1.3. clean

Invoking the Make utility and passing "clean" as a parameter deletes tool generated files in the configuration output folders ("X1X\<MICRO\_VARIANT>\modules\<msn>\sample\_application\< MICRO\_SUB\_VARIANT>\src" and

"X1X\<MICRO\_VARIANT>\modules\<msn>\Sample\_application\< MICRO\_SUB\_VARIANT>\include"in this case)

#### 3.4.1.4. clean all

Invoking the Make utility and passing "clean\_all" as a parameter deletes all files such as object file, list files and map files from the output folder ("X1X\< MICRO\_VARIANT >

\modules\<msn>\sample\_application\< MICRO\_SUB\_VARIANT >\obj" in this case).

#### 3.4.1.5. generate\_<msn>\_config

Invoking the Make utility and passing "generate\_<MSN>\_config" as a parameter invokes the <MSN> Driver Generation Tool. The tool takes the ECU Configuration Description File(s) ("X1X\< MICRO\_VARIANT >\modules\<msn>\Sample\_application\<MICRO\_SUB\_VARIANT> \ AUTOSAR\_VERSION

config\<MSN>\_Sample\_ <MICRO\_SUB\_VARIANT>\.arxml" as input and generates the output files in folders

"X1X\< MICRO\_VARIANT >\modules\<msn>\Sample\_application\< MICRO\_SUB\_VARIANT>\ AUTOSAR\_VERSION \src" and

"X1X\< MICRO\_VARIANT >1\modules\<msn>\Sample\_application\< MICRO\_SUB\_VARIANT>\ AUTOSAR\_VERSION \include").

App\_<MSN>\_< MICRO\_SUB\_VARIANT >\_Sample.out

Invoking the Make utility and passing "Sample.out" as a parameter invokes the compiler and linker sequentially. Then it generates the executable "App\_<MSN>\_< MICRO\_SUB\_VARIANT > \_Sample.out".

### 3.4.1.6. <Msn>\_PBcfg.s37

Invoking the Make utility and passing "<Msn>\_PBcfg.s37" as a parameter invokes the compiler and linker sequentially and generates the Motorola S-Record file

"<Msn>\_PBcfg.s37" in the output folder.

This scenario typically arises when post-build parameters are modified and only the database needs to be flashed into the device without disturbing the other ROM contents.

### **Chapter 4 Support for Different Interrupt Categories**

The <MSN> Driver supports CAT1 and CAT2 interrupt categories:

#### CAT1

In CAT1 type of interrupt ISR does not use an operating system service. In practice, the OS does not handle these interrupts, and the interrupt handler is implemented in the driver code, with the only restriction that OS services cannot be called. Typically, these are the fastest highest priority interrupts.

#### CAT2

In CAT2, type of interrupt wherein the ISR is handled by the system and OS calls can be called from the handler.

For CAT1 and CAT2, the selection of interrupt category is for each interrupt in the module. Individual MCAL module does not contain any option for interrupt category configuration. The user has to configure the ISR category in OS and to use the right MCAL specified name and MCAL expects "ISR(INTERRUPT\_NAME)" keyword defined in OS in case of CAT2.

#### **Notes**

- The understanding is Os module does not publish short name handles for CAT1 Oslsr container. However, the OS should define it in the interrupt vector table.
- The understanding is that Os module should publish short name handles for CAT2 Oslsr container according to ecuc\_sws\_2108 requirement by adding the Os\_" prefix to the configured interrupt name.

#### Reference between the <MSN> module and OS:

<Msn> module's <Module>\_Irq.c/h files include "Os.h" header file to obtain the interrupt category information configured in the OS. Therefore, following preprocessor definitions are expected to be published in Os.h file by the OS in case of CAT2 or to be used in the interrupt vector table in case of CAT1.

Table 4-1 CAT1 and CAT2 Naming Convention

Interrupt Category	Naming Convention
CAT1	<mcal_interrupt_name>_ ISR</mcal_interrupt_name>
CAT2	<mcal_interrupt_name>_CAT2_ISR</mcal_interrupt_name>
CAT2 (In case the handles of the Oslsr container are generated without 'Os_' prefix by Os generation tool)	Os_ <mcal_interrupt_name>_CAT2_ISR</mcal_interrupt_name>

#### MCAL in Stand Alone:

In case if the MCAL modules are to be used stand-alone without having standard Autosar Os module, the user has to prepare an Os.h stub file with the published handles only for those interrupt names which are to be used as CAT2.

Table 4-2 List of ISR Names that need to be configured and published in Os.h (CAT2) or used in the interrupt vector table (CAT1) for <MSN> Driver

SI. No.	CAT1	CAT2	CAT2(In case the handles of the Oslsr container are generated without 'Os_' prefix by Os generation tool)	
1	<msn>n_SGm_ISR</msn>	<msn>n_SGm_CAT2_ISR</msn>	Os_ <msn>n_SGm_CAT2_ISR</msn>	
2	<msn>_DMA_CHxy_ISR</msn>	<msn>_DMA_CHxy_CAT2_ISR</msn>	Os_ <msn>_DMA_CHxy_CAT2_IS R</msn>	

Where

'n' indicate HW Unit number

'm' indicate SG Unit number

'xy' indicate DMA channel Id number

GNU MAKE Environment Chapter 5

### **Chapter 5 GNU MAKE Environment**

Every component is delivered with the necessary Make scripts that are required to integrate the component with the application. The scripts are compatible with GNU Make version 3.81.

All the delivered Makefiles have to be included in the project level base Makefile in order to build the component together with the application. Refer section "Integration and Build Process" of the respective component User Manuals for more information on the Makefile variables and their usage.


### 5.1. Build Process with GNUMAKE

When the batch file of certain application is built, the GNU Make utility will be searched by batch file. The GNU Make utility should be present in the default path specified by GNUMAKE\PATH variable. By making use of the GNU Make utility, the batch file will be compiled.

### 5.2. Build Process without GNUMAKE


If GNU Make utility is not present at the default path or present in some other directory, the following procedure is followed to set the Environmental variable GNUMAKE\PATH.

1. Right click on "My Computer" select properties, user will find System Properties.




Chapter 5 GNU MAKE Environment

2. In System Properties select "Advanced" option, user will find "Environmental Variables" at the bottom side of window.

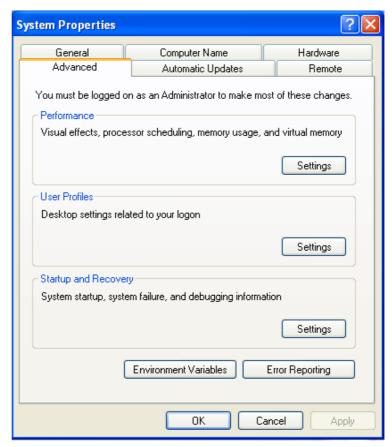


3. Click on "Environmental Variables", user will find "Environment Variables" window in that, select "New".

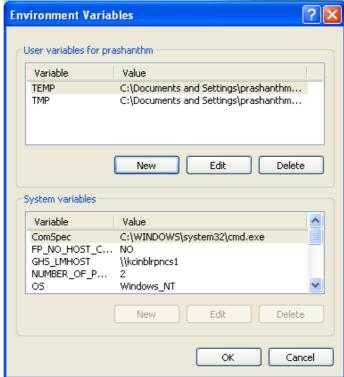

GNU MAKE Environment Chapter 5

4. After step 3, user can find "New User Variable" window with "Variable name" and "Variable path" options which needs to be set, Variable name will be set as GNUMAKE and Variable path is the path of the directory where GNU Make utility is present and click ok.



5. After step 4, in "System Properties" window click "Apply" and then "Ok".

**Remark** GNU Make utility version 3.81 must be separately downloaded and installed to use the Makefiles delivered along with the component. More information on the utility can be found at http://www.gnu.org/

Load Binaries Chapter 6

### **Chapter 6** Load Binaries

Once the Executable or S-Record is generated using the project level base Makefile, it needs to be downloaded into the target using a Flash programmer.

The user has to read the instructions provided in the Flash programmer's User Manual thoroughly before using it.

Chapter 6 Load Binaries

Appendix Chapter 7

### **Chapter 7** Appendix

### 7.1. Translation XML File

Translation XML File content format shall be given as mentioned below:

```
<?xml version="1.0" encoding="UTF-8"?>
<!--
The tag PATH-DETAILS should not be renamed since it is top level element.
-->
<PATH-DETAILS>
<!--</pre>
```

TRANSLATION-FILE-PATH should contain the path of the translation header file.

The tag TRANSLATION-FILE-PATH should not be renamed. Only respective value should be updated for the translation header file.

```
-->
<TRANSLATION-FILE-PATH>
<value_of_<MSN>DeviceName>Path</value_of_<MSN>DeviceName>
</TRANSLATION-FILE-PATH>
<!--
```

The tags present in DEVICE-FILE-PATH tag should contain the path of the device specific C Header File.

The tags present in DEVICE-FILE-PATH should be equal to the value for parameter <MSN>DeviceName present in <MSN>General container.

The tag DEVICE-FILE-PATH should not be renamed.

If multiple device header files need to provide for same device then each file name should be separated with space.

```
-->
<DEVICE-FILE-PATH>
<value_of_<MSN>DeviceName>Path</value_of_<MSN>DeviceName>
</DEVICE-FILE-PATH>
</PATH-DETAILS>
```

### 7.2. Configuration XML File

Configuration XML File content format to be given as mentioned below:

```
<? xml version="1.0" encoding="UTF-8"?> <!--
```

Chapter 7 Appendix

```
None of the tag from this XML should be renamed or deleted.
-->
<XML>
 <!-- Supported Command Line options -->
 <OPTION>
  <!-- Only ON or OFF should be provided. -->
  <HELP>ON/OFF</HELP>
  <!-- Only ON or OFF should be provided. -->
  <LOG>ON/OFF</LOG>
  <!-- Only ON or OFF should be provided. -->
  <DRYRUN>ON/OFF</DRYRUN>
  <!-- Only ON or OFF should be provided. -->
  <OUTPUT>OFF</OUTPUT>
  <!-- Name of output directory -->
  <OUTPUT-PATH>Path</OUTPUT-PATH>
 </OPTION>
 <!-- To provide input files. If multiple input files need to be provided then
    each file should be separated with ",". -->
 <INPUT-FILE>Path</INPUT-FILE>
</XML>
```

### **Revision History**

SI.No.	Description	Version	Date
1.	Initial Version	1.0.0	31-Jan-2013
2.	Following changes are made: 1Osrc and -Oinc options are added at section 4.3. Usage. 2. Error message ERR000008 is updated at section 4.8.1. Error Messages. 3. F1x is renamed to X1x in all relevant places.	1.0.1	16-Oct-2013
3.	Following changes are made: 1. Chapter 5 is updated for paths. 2. F1x and F1L names are removed. 3. Makefile location is updated. 4. Name of executable is updated.	1.0.2	24-Jan-2014
4.	Following changes are made: 1. Page Number alignment is corrected. 2. R- Number is added for document.	1.0.3	08-April-2014
5.	Following changes are made: 1. Copyright year information is corrected. 2. R- Number is added for document.	1.0.4	17-July-2014
6.	Following changes are made:  1. Document is updated as per template.	1.0.5	09-Aug-2014
7	Following changes are made:  1. New Error message ERR000031 added.  2. Warning message WRN000001 message updated to error message ERR000032.  3. Updated chapter4 for RUCG and DLL usage.	1.0.6	23-Mar-2016
8.	Following changes are made:  1. Chapter 2 and 3 removed to make the document independent of any specific tool.  2. Autosar version 3.2.2 version check removed from section 3.2.1.	1.0.7	29-Jun-2016
9	Following changes are made: 1. Added R-number. 2. Updated Notice and copyright information.	1.0.8	17-Feb-2017

## Getting Started Document for X1x MCAL Driver User's Manual Version.1.0.8

Publication Date: Rev.1.01, February 17, 2017

Published by: Renesas Electronics Corporation



### SALES OFFICES

Renesas Electronics Corporation

http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics America Inc.
2801 Sout Boulevard Santa Clara, CA 95050-2549, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130
Renesas Electronics Canada Limited
9251 Yonge Sireet, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH Arcadiastrasse 10, 40472 Düsseldorf, Germany Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709, Quantum Plaza, No. 27 ZhiChunLu Haidian District, Beijing 100191, P.R.China
Tel: +86-10-8235-1155, Fax-+86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, P. R. China 200333
Tel: +86-2-12226-0888, Fax. +86-21-2226-0999

Reneasa Electronics Hong Kong Limited
Unit 1601-1611, 161F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-265-6688, Fax: +852-2868-9022
Reneasa Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +868-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Reneasa Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amoorp, Amoorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tei: +60-37955-9390, Fax: +60-37955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL II Stage, Indiranagar, Bangalore, India Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd. 12F., 234 Teheran-ro, Gangnam-Gu, Seoul, 135-080, Korea Tel: +82-2-558-3737, Fax: +82-2-558-5141

# Getting Started Document for X1x MCAL Driver User's Manual

