

# **CAN Interface**

# **Technical Reference**

Version 6.09.00

Authors Rüdiger Naas, Eugen Stripling

Versions: 6.09.00 Status: Released



# 1 Document Information

# 1.1 History

Author	Date	Version	Remarks
Eugen Stripling Rüdiger Naas	2012-07-17	5.00	ASR R4.0 Rev 3
Eugen Stripling	2013-04-03	5.01.00	ESCAN00065368 ESCAN00066338 ESCAN00066340 Adapted according to ESCAN00066285 Adapted according to ESCAN00065289 ESCAN00066396 Adapted according to ESCAN00064304
Rüdiger Naas	2013-07-24	5.01.01	ESCAN00066794
Eugen Stripling	2013-09-27	6.00.00	Adapted due to: AR4-307: J1939 support AR4-438: Dynamic address lookup table AR4-397: CAN FD support
Eugen Stripling	2014-05-19	6.01.00	CAN FD support extended: Rx-FD and Rx- and Tx-PDUs with up to 64 bytes payload
Rüdiger Naas	2014-07-10	6.02.00	Multiple CAN driver support
Eugen Stripling	2014-08-25	6.02.00	ESCAN00077304, Restriction concerning the handling of FD/Not-FD FullCAN-Rx-PDUs added
Eugen Stripling	2014-09-22	6.02.00	ESCAN00078524, CanTSyn added, Post-build selectable
Eugen Stripling	2014-11-25	6.03.00	Channel specific J1939 dynamic address
Eugen Stripling	2015-01-26	6.04.00	Chapter 3.8 adapted to changed implementation
Eugen Stripling	2015-05-18	6.05.00	Adapted due to FEAT-366
Eugen Stripling	2015-11-20	6.06.00	Adapted due to FEAT-1429
Eugen Stripling	2016-01-09	6.06.00	ESCAN00087340
Eugen Stripling	2016-02-22	6.07.00	Feature Extended RAM-check added, ESCAN00087587
Eugen Stripling	2016-06-24	6.08.00	Feature: Data checksum added
Eugen Stripling	2016-09-14	6.09.00	Adapted due to FEAT-2076:



			Behavior of Tx-PDU filter extended
Eugen Stripling	2016-09-26	6.09.00	Adapted due to FEAT-2024: Set reception mode

Table 1-1 History of the Document

# 1.2 Reference Documents

No.	Title	Version
[1]	AUTOSAR_SWS_CANInterface.pdf	5.0.0 6.0.0
[2]	AUTOSAR_SWS_DevelopmentErrorTracer.pdf	3.2.0
[3]	AUTOSAR_SRS_BSWGeneral.pdf	3.2.0

Table 1-2 References Documents



#### Please note

We have configured the programs in accordance with your specifications in the questionnaire. Whereas the programs do support other configurations than the one specified in your questionnaire, Vector's release of the programs delivered to your company is expressly restricted to the configuration you have specified in the questionnaire.



# **Contents**

1	Docui	ment Info	ormation	2
	1.1	History		2
	1.2	Referer	nce Documents	3
2	Introd	uction		10
	2.1	Archited	cture Overview	10
3	Funct	ional Des	scription	12
	3.1	Deviation	ons regarding AUTOSAR standard	12
	3.2	Feature	e List	12
	3.3	Initializa	ation	13
	3.4	Transm	ission	14
		3.4.1	Dynamic transmission	15
		3.4.2	Transmit-buffer	15
		3.4.3	Multiple Transmit-buffers	16
		3.4.4	Tx confirmation polling support	17
		3.4.5	Data checksum Tx	18
	3.5	Recepti	ion	18
		3.5.1	Ranges	19
		3.5.2	DLC check	20
		3.5.3	Data checksum Rx	20
		3.5.4	Control of reception mode of a Rx-PDU	21
	3.6	Commu	unication Modes	22
		3.6.1	Controller Mode	22
		3.6.2	PDU Mode	22
	3.7	Polling.		23
	3.8	CAN F	D	24
	3.9	Meta da	ata Rx- / Tx-support	24
	3.10	J1939 d	dynamic address support	24
	3.11	Error N	otification	25
	3.12	Transce	eiver handling	30
	3.13	Sleep /	WakeUp	31
	3.14	Bus Off	f	33
	3.15	Version	ı Info	34
	3.16	Partial I	Networking	34
	3.17	Service	es used by the CAN Interface	36
	3.18	Multiple	e CAN drivers	36
	3.19	Extende	ed RAM-check	37



	3.20	Critical S	Sections	38
4	Integr	ation		40
	4.1	Files an	d include structure	40
		4.1.1	Static Files	40
		4.1.2	Dynamic Files	40
	4.2	Include	Structure	41
	4.3	Compile	er Abstraction and Memory Mapping	42
5	Confi	guration		43
	5.1	Configu	ration of Post-Build	43
6	API D	escription	n	44
	6.1	Services	s provided by the CAN Interface	44
		6.1.1	CanIf_GetVersionInfo	44
		6.1.2	CanIf_Init	44
		6.1.3	CanIf_SetControllerMode	45
		6.1.4	CanIf_GetControllerMode	45
		6.1.5	CanIf_Transmit	46
		6.1.6	CanIf_TxConfirmation	46
		6.1.7	CanIf_RxIndication	47
		6.1.8	CanIf_ControllerBusOff	47
		6.1.9	CanIf_SetPduMode	48
		6.1.10	CanIf_GetPduMode	48
		6.1.11	CanIf_InitMemory	49
		6.1.12	CanIf_CancelTxConfirmation	49
		6.1.13	CanIf_SetTrcvMode	50
		6.1.14	CanIf_GetTrcvMode	50
		6.1.15	CanIf_GetTrcvWakeupReason	51
		6.1.16	CanIf_SetTrcvWakeupMode	51
		6.1.17	CanIf_CheckWakeup	52
		6.1.18	CanIf_CheckValidation	52
		6.1.19	CanIf_ResetBusOffStart	
		6.1.20	CanIf_ResetBusOffEnd	
		6.1.21	CanIf_CancelTransmit	54
		6.1.22	CanIf_CancelTxNotification	54
		6.1.23	CanIf_SetDynamicTxId	55
		6.1.24	CanIf_ControllerModeIndication	
		6.1.25	CanIf_TrcvModeIndication	56
		6.1.26	CanIf_ConfirmPnAvailability	56
		6.1.27	CanIf_ClearTrcvWufFlagIndication	57



		6.1.28	CanIf_CheckTrcvWakeFlagIndication	57
		6.1.29	CanIf_SetBaudrate	58
		6.1.30	CanIf_ChangeBaudrate	58
		6.1.31	CanIf_ChangeBaudrate	59
		6.1.32	CanIf_GetTxConfirmationState	59
		6.1.33	CanIf_SetAddressTableEntry	60
		6.1.34	CanIf_ResetAddressTableEntry	60
		6.1.35	CanIf_RamCheckExecute	61
		6.1.36	CanIf_RamCheckEnableMailbox	61
		6.1.37	CanIf_RamCheckEnableController	62
		6.1.38	CanIf_RamCheckCorruptMailbox	62
		6.1.39	CanIf_RamCheckCorruptController	63
		6.1.40	CanIf_SetPduReceptionMode	63
	6.2	Callout	Functions	64
		6.2.1	EcuM_BswErrorHook	64
		6.2.2	CanIf_RxIndicationSubDataChecksumRxVerify	64
		6.2.3	CanIf_TransmitSubDataChecksumTxAppend	65
7	AUTO	OSAR Star	ndard Compliance	66
	7.1	Not sup	ported AUTOSAR features	66
		7.1.1	Tx notification status	66
		7.1.2	Rx notification status	66
		7.1.3	Rx buffer	66
	7.2	Deviatio	ons	66
		7.2.1	Tx buffer	66
		7.2.2	Partial networking	66
		7.2.3	AUTOSAR version check	66
	7.3	Limitatio	ons	66
8	Gloss	sary and A	Abbreviations	67
	8.1	Glossar	y	67
	8.2	Abbrevi	ations	67
9	Conta	act		69



Illustrations		
Figure 2-1	AUTOSAR layer model	
Figure 2-2	Interfaces to adjacent modules of the CAN Interface (* optional)	
Figure 3	Configuration of multiple Transmit-buffers	
Figure 3-4	Wake up sequence (No validation)	
Figure 3-5	Wake up sequence (Wakeup validation)	
Figure 4-1	Include structure	41
Tables		
Table 1-1	History of the Document	
Table 1-2	References Documents	
Table 3-1	List of supported features	
Table 3-2	Mapping of service IDs to services	
Table 3-3	Errors reported to DET	
Table 3-4	Sub-features of feature Partial Networking	
Table 3-5	API functions used by the CAN Interface	
Table 3-6	Adapted CAN driver APIs (* optional)	37
Table 3-7	APIs of CAN Interface which have to be used in multiple CAN driver	0.7
Table 3-8	configurationsCritical Section Codes	37 39
Table 3-9	Restrictions for the different lock areas	
Table 4-1	Static files	
Table 4-2	Generated files	
Table 4-3	Compiler abstraction and memory mapping	
Table 6-1	API CanIf GetVersionInfo	
Table 6-2	API CanIf Init	
Table 6-3	API CanIf SetControllerMode	
Table 6-4	API CanIf_GetControllerMode	
Table 6-5	API CanIf_Transmit	
Table 6-6	API CanIf TxConfirmation	
Table 6-7	API CanIf_RxIndication	
Table 6-8	API CanIf ControllerBusOff	
Table 6-9	API CanIf SetPduMode	
Table 6-10	API CanIf GetPduMode	
Table 6-11	API CanIf InitMemory	
Table 6-12	API CanIf CancelTxConfirmation	
Table 6-13	API CanIf SetTrcvMode	
Table 6-14	API CanIf_GetTrcvMode	
Table 6-15	API CanIf GetTrcvWakeupReason	
Table 6-16	API CanIf_SetTrcvWakeupMode	
Table 6-17	API CanIf_CheckWakeup	
Table 6-18	API CanIf CheckValidation	
Table 6-19	API CanIf ResetBusOffStart	
Table 6-20	API CanIf ResetBusOffEnd	
Table 6-21	API CanIf_CancelTransmit	
Table 6-22	API CanIf_CancelTxNotification	
Table 6-23	API CanIf_SetDynamicTxId	
Table 6-24	API CanIf ControllerModeIndication	
Table 6-25	API CanIf TrcvModeIndication	
Table 6-26	API CanIf ConfirmPnAvailability	
Table 6-27	API CanIf_ClearTrcvWufFlagIndication	
Table 6-28	API CanIf_CheckTrcvWakeFlagIndication	



Table 6-29	API CanIf_SetBaudrate	58
Table 6-30	API CanIf_ChangeBaudrate	
Table 6-31	API CanIf_ChangeBaudrate	
Table 6-32	API CanIf_GetTxConfirmationState	59
Table 6-33	API CanIf_SetAddressTableEntry	60
Table 6-34	API CanIf_ResetAddressTableEntry	60
Table 6-35	API CanIf_RamCheckExecute	61
Table 6-36	API CanIf_RamCheckEnableMailbox	61
Table 6-37	API CanIf_RamCheckEnableController	
Table 6-38	API CanIf_RamCheckCorruptMailbox	62
Table 6-39	API CanIf_RamCheckCorruptController	
Table 6-40	API CanIf_SetPduReceptionMode	
Table 6-41	EcuM_BswErrorHook	64
Table 8-1	Glossary	
Table 8-2	Abbreviations	68





# 2 Introduction

This document describes the functionality, API and configuration of the AUTOSAR CAN Interface as specified in [1]. It is based on the AUTOSAR specification release 4.0.3. The CAN Interface is a hardware independent layer with a standardized interface to the CAN Driver and CAN Transceiver Driver layer and upper layers like PDU Router, Communication Manager and the Network Management.

Supported AUTOSAR Release:	4.0.3		
Supported Configuration Variants:	Pre-compile, Link-time, Post-build-loadable		
Vendor ID:	CANIF_VENDOR_ID	30 decimal (= Vector-Informatik, according to HIS)	
Module ID:	CANIF_MODULE_ID	60 (according to ref.[3])	

#### 2.1 Architecture Overview

The following figure shows where the CAN Interface is located in the AUTOSAR architecture.

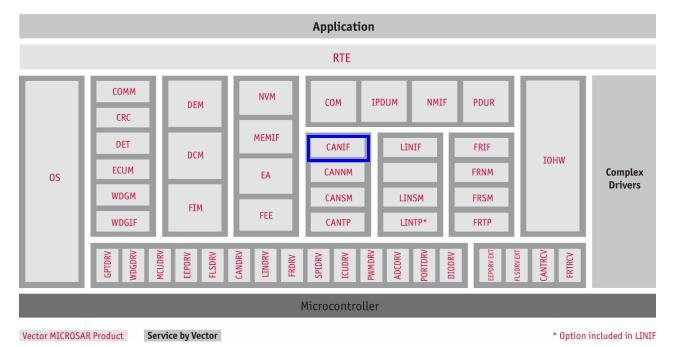


Figure 2-1 AUTOSAR layer model

The CAN Interface provides a standardized interface for all upper layers which require CAN communication. Therefore these upper layers have to communicate with the CAN



Interface which is responsible for the CAN communication. This includes the transmission and the reception of messages and the state handling of the CAN controllers as well.

The next figure shows the interfaces to adjacent modules of the CAN Interface. These interfaces are described in chapter 6.

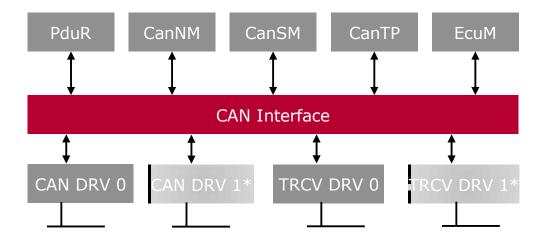


Figure 2-2 Interfaces to adjacent modules of the CAN Interface (\* optional<sup>1</sup>)

<sup>&</sup>lt;sup>1</sup> NOTE: Multiple CAN driver and TRCV driver are supported optional



# 3 Functional Description

# 3.1 Deviations regarding AUTOSAR standard

Please note that the CAN Interface is tailored by Vector Informatik according to customer requirements before delivery. As a result not all features listed below might be supported by a delivered module.

For deviations and extensions regarding the AUTOSAR standard [1], please see chapter 7.

# 3.2 Feature List

<b>Available Features For This</b>	Available Features For This BSW Module:			
Feature Naming	Supported	Short Description		
Initialization		·		
Generic Initialization		General initialization of the CAN Interface (CanIf Init())		
Communication		\		
Transmission	-	Transmission of PDUs		
Dynamic transmission		Transmission of PDUs with changeable CAN IDs		
Transmit-buffer		Buffering (send request and data) of Tx-PDUs mapped to a Tx-buffer in the CAN Interface. Two handling types of Tx-buffer are supported: FIFO and prioritized by CAN identifier.		
Multiple Tx-BasicCAN hardware objects	-	Per CAN channel multiple Tx-BasicCAN hardware objects may be configured. This feature can only be used if the underlying CAN driver supports this feature as well.		
Multiple transmit-buffers per CAN channel		Per CAN channel multiple independent transmit-buffers may be configured with different handling types: FIFO or prioritization by CAN identifier. This feature can only be used in combination with above mentioned feature "Multiple Tx-BasicCAN hardware objects".		
Cancellation of Tx-PDUs	-	Cancellation of PDUs and requeueing. (Feature to avoid inner priority inversion)		
Transmit confirmation		Call back for successful transmission		
Reception		Reception of PDUs		
Receive indication		Call back for reception of PDUs		
Control of reception mode of a Rx-PDU	-	This feature provides the ability to control the reception mode of a Rx-PDU individually at runtime.		
DLC check		Check DLC of received PDUs against predefined values		
CAN FD support		CAN with flexible data-rate		
Meta data Rx- / Tx-support	-	Support for dynamic CAN identifier handling by using of SDU meta data		
J1939 Dynamic Address Support	-	Translating of addresses according to J1939 by using of dynamic address lookup tables which are maintained by J1939Nm.		
Data checksum Rx		Verification of checksum of Rx-PDUs		
Data checksum Tx	-	Appending of checksum to Tx-PDUs		
Controller Modes				
Sleep mode	-	Support sleep mode		
External wake up (CAN)	-	Support external wake up by CAN Driver		
External wake up (Transceiver)	External wake up (Transceiver) Support external wake up by Transceiver Driver			
Wake up validation	-	Support wake up validation for external wake up events		
Internal wake up		Internal wake up by calling CanIf_SetControllerMode()		



Stop mode		Support stop mode
BusOff detection		Handling of bus off notifications
Error Reporting		
DET		Support Development Error Detection (error notification)
Mailbox objects		
Tx BasicCAN	-	Standard mailbox to send CAN frames (Used by CAN Interface data queue)
Tx FullCAN	-	Separate mailbox for special Tx message used
Rx BasicCAN	-	Standard mailbox to receive CAN frames (depending on hardware, FIFO or shadow buffer supported)
Rx FullCAN	-	Separate mailbox for special Rx message used
Miscellaneous		
Transceiver handling	-	API for upper layers to set and read transceiver states; Interface to the Transceiver Driver
Version API		API to read out component version
Supported ID types - Standard Identifiers - Extended Identifiers - Mixed Identifiers	:	Support of CAN Standard (11 bits) identifiers Support of CAN Extended (29 bits) identifiers Support standard as well as extended identifiers
Multiple CAN networks	-	Each CAN network has to be connected to exactly one controller
Multiple CAN driver	-	Supports multiple CAN driver
Partial Networking	-	Handling of partial networking transceiver Tx-PDU filter during wake-up
Tx Confirmation Polling Support	-	This service provides the information on whether any Tx confirmation has occurred for a CAN channel since the last start of that CAN channel at all.
Post-build loadable		Post-build loadable allows the re-configuration of an ECU at Post-build time
Post-build selectable	-	MICROSAR identity manager using Post-build selectable
Extended RAM-check	-	This service provides the ability in order to request an underlying CAN-channel to execute a check of CAN-controller-HW-registers. The usage of this feature requires a corresponding license.

Table 3-1 List of supported features

## 3.3 Initialization

Several functions are available to initialize the CAN Interface. The following code example shows which functions have to be called to initialize the CAN Interface and to allow transmission and reception.



state. For some CAN Controllers it is necessary to have a recessive signal on the Rx Pin to be able to initialize the CAN Controller. This means the transceiver has to be set to "normal mode" before CanIf\_Init() is called. \*/

Can InitMemory() and Can Init();

/\* have to be called before CanIf\_Init is called. \*/
CanIf Init(<PtrToCanIfConfiguration>);

CanIf\_SetControllerMode(0, CANIF\_CS\_STARTED);

/\* The controller mode of CAN-channel 0 is set to started mode.

This means the CAN controller is initialized and ready to communicate (acknowledge of the CAN controller is activated). Communication is not yet possible because the CAN Interface will neither pass Tx PDUs from higher layers to the CAN Driver nor accept Rx PDUs from the CAN Driver. \*/

CanIf SetPduMode(0, CANIF SET ONLINE);

#### 3.4 Transmission

The transmission of PDUs is only possible after the CAN Interface and CAN Driver are initialized and the CAN Interface resides in the CANIF\_CS\_STARTED / CANIF\_GET\_ONLINE or CANIF\_CS\_STARTED / CANIF\_GET\_TX\_ONLINE mode. In all other states the Tx requests are rejected by the CAN Interface.

The Tx request has to be initiated by a call to the function:

```
CanIf Transmit(<TxPduId>, <PduInfoPtr>);
```

The CAN Interface uses the PDU ID (<TxPduId>) to acquire more information from the generated data to be able to transmit the message. This data is used to call the function



Can\_Write of the CAN Driver which needs information about the PDU like the CAN identifier, length of data, data by itself and the hardware transmit handle which represents the mailbox used for transmission of the PDU.

After a successful transmission of the message on the bus a confirmation function is called by the CAN Driver either from interrupt context or in case of Tx polling from task context. This confirmation is dispatched in the CAN Interface to notify the corresponding higher layer about the transmission of the PDU. For this purpose for each PDU a call back function has to be specified at configuration time.

The transmission request is rejected by returning E NOT OK in the following cases:

- The CAN Interface is not in the controller state CANIF CS STARTED
- The CAN Interface is not in the PDU mode CANIF\_GET\_ONLINE or CANIF GET TX ONLINE
- The transmit buffer is not active and the corresponding mailbox used for transmission is occupied (BasicCAN Tx messages only).
- An error occurred during transmission (DET will be informed)

# 3.4.1 Dynamic transmission

The feature is activated by the parameter "Dynamic Tx Objects".

The adjustments for the dynamic objects are the same as for the static with the exception that the CAN ID and the attribute whether extended or standard CAN ID can be selected manually.

By default the dynamic object has the CAN ID parameterized during configuration time until it is changed by the call of the API <code>CanIf\_SetDynamicTxId()</code>. In order to set an extended CAN ID the most significant bit of its value passed to the API shall be set.

The PDU IDs of the dynamic objects are represented as symbolic handles in the file CanIf Cfg.h.

## 3.4.2 Transmit-buffer

The CAN Interface provides a mechanism to buffer Tx-PDUs (including data) which are mapped to a Tx-buffer. This means if the Tx-hardware-object of such Tx-PDU is occupied the Tx-PDU-instance is stored within the CAN Interface until the Tx-hardware-object becomes free. Two handling types of a transmit-buffer are supported:

- 1. FIFO
- 2. Prioritization by CAN-identifier

The handling type defines in which manner the Tx-PDUs stored within the Tx-buffer are transmitted in case of the underlying Tx-hardware-object becomes free.

**FIFO:** The stored Tx-PDUs are transmitted in manner First-In-First-Out. Each Tx-PDU-instance is stored. If the FIFO is full then NO Tx-PDUs are stored until the FIFO becomes free.





## Caution

In case of transmit-buffer of handling type FIFO only one instance of a Tx-PDU (the last one stored within the FIFO) can be and is cancelled from the FIFO via usage of API CancelTransmit! (Feature: "Cancellation of Tx-PDUs", see chapter 6.1.21).

Prioritization by CAN-identifier: The stored Tx-PDUs are transmitted in manner: Tx-PDU with high priority is sent before those one with lower priority. The priority is given by the CAN-identifier of the Tx-PDU. A Tx-PDU with a low CAN-identifier has higher priority than a one with greater CAN-identifier. The priority of a Tx-PDU is static and is determined from values of parameters CanIfTxPduCanId and CanIfTxPduCanIdType. Please consider this aspect in case of configuration of Tx-PDUs with dynamic CAN-identifier. Only one instance of each Tx-PDU is stored within such Tx-buffer: If a Tx-PDU is requested to be transmitted and the Tx-buffer of this Tx-PDU is already in use the already stored data of this Tx-PDU is overwritten in order to ensure the transmission of most newest data.

This handling type can be used to avoid inner priority inversion. This means if the CAN Interface passes a transmit request to the CAN Driver while all Tx-hardware-objects are occupied and at least one hardware object is occupied by a CAN message with lower priority than the message used for the current transmit request the CAN Driver initiates the cancellation of the message with the lowest priority. The cancelled CAN-message is stored in the Tx-buffer of the CAN Interface if the corresponding Tx-buffer is free. Otherwise it is discarded to ensure the transmission of most newest data. By this way a Tx-hardware message object becomes free and allows the CAN Interface to pass the CAN-message with the highest priority to the CAN Driver.



#### Caution

The described: "inner priority inversion" is only supported if at most only one Tx-buffer of handling type: Prioritization by CAN-identifier is configured per CAN-channel!

At all the Tx-PDUs stored within a Tx-buffer are processed either in context of the Tx-confirmation interrupt or in context of CAN Driver's Tx-main-function in case of polling mode.

The configuration of multiple transmit-buffers is described in chapter 3.4.3.

## 3.4.3 Multiple Transmit-buffers

This feature can only be used if the underlying CAN driver supports the feature "Multiple Tx-BasicCAN hardware objects". The Figure 3 shows the objects which are needed to be



configured within the EcuC-configuration and the relationship among themselves. For each Transmit-buffer a triple of objects: CanHardwareObject, CanIfHthCfg and CanIfBufferCfg must be configured and linked with each other and to corresponding CAN-channel (objects: CanController and CanIfCtrlCfg).

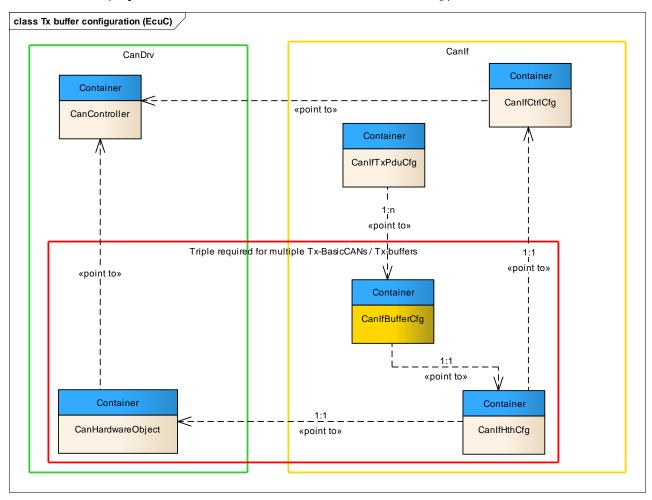


Figure 3 Configuration of multiple Transmit-buffers

After this step you can map Tx-PDUs to configured Transmit-buffer (object: CanIfBufferCfg). The described handling type of a transmit-buffer (see chapter 3.4.2) can be configured via the parameter CanIfTxBufferHandlingType. For further information about configuration of a Transmit-buffer please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the descriptions of attributes of container CanIfBufferCfg.

# 3.4.4 Tx confirmation polling support

The CAN Interface supports a service which provides the information on whether any Tx confirmation has occurred for a CAN channel since the last start of that CAN channel at all. This feature can be enabled via the parameter

CanIfPublicTxConfirmPollingSupport. If enabled the API CanIf GetTxConfirmation() is provided and can be used for this service.



#### 3.4.5 Data checksum Tx

This feature can be used to append a checksum to data of a Tx-PDU. The configuration of such Tx-PDU can be done individually via the parameter CanIfTxPduDataChecksumPdu. The appending of checksum is application specific and must be implemented within the API CanIf\_TransmitSubDataChecksumTxAppend(). For further information please see the description of the prototype of this API in chapter 6.2.3.

For further information about configuration of this feature at all please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the description of mentioned parameters.

# 3.5 Reception

Reception of PDUs is only possible in the states

► CANIF CS STARTED and CANIF GET ONLINE

or

► CANIF\_CS\_STARTED **and** CANIF\_GET\_RX\_ONLINE.

In all other states the PDUs received by the CAN Driver are discarded by the CAN Interface without notification to the upper layers.

The CAN Interface supports reception of FullCAN- as well as BasicCAN-messages. The upper layers do not notice any differences between these two reception types as in both cases a call back function is called which was configured for the specified PDU in the generation tool.

The upper layer is notified about the PDU ID given by the corresponding upper layer at configuration time, the received data and depending on the used indication function about the length of the received data.

In case of BasicCAN reception the CAN Interface has to search through a list of all known Rx messages and compare the received CAN ID with the CAN ID in the Rx message list.

The CAN Interface offers three different search algorithms:

- ▶ Linear search: The list of all Rx PDUs is searched from high priority (Low CAN Identifier) to low priority (High CAN Identifier). This algorithm is efficient for a small amount of Rx messages.
- ▶ **Double Hash search**: The Rx PDU is calculated via two special hash functions. The algorithm is very efficient for a high amount of Rx messages and always takes the same time.





#### Note

The Double Hash search algorithm uses the mathematical operation modulo

▶ **Binary search**: The list of Rx PDUs is split in two equal sized parts and the search is continued recursively on a list of PDUs which contains half the messages. This search algorithm terminates faster for big amounts of Rx messages than the linear search.



#### Caution

The binary search algorithm cannot be used for mixed ID systems.

# **3.5.1** Ranges

The BasicCAN message object can be used to receive groups of CAN messages called ranges. A range can be defined either by an upper and a lower CAN identifier or by a mask and a code.

The definition of a range by an upper and a lower CAN identifier is performed by the following parameters:

- CanifRxPduCanidRangeLowerCanid and
- CanIfRxPduCanIdRangeUpperCanId.

A mask-code-range is defined by parameters:

- ► CanIfRxPduCanId (code) and
- CanifRxPduCanidMask (mask).

In case of a mask-code-range each CAN identifier which fulfills the following equation pass the range and the reception of the corresponding Rx PDU is reported to the upper layer.

< <CAN identifier> & <mask> == <code> & <mask>

One PDU ID is assigned to all messages which pass the configured range. Hence the upper layer is not able to get additional message properties like the CAN identifier. For each range an indication function can be assigned in the generation tool in order to notify the higher layer about the reception of a message.

A range defined by an upper and a lower CAN identifier can be converted into a mask-code-range. Therefor please see the following example.





# Example: How to convert a lower CAN ID and an upper CAN ID into mask and code?

Lower CAN ID: 0x400 Upper CAN ID: 0x43F

The code is same as the lower CAN ID:

code = 0x400

You need the count which is upper CAN ID – lower CAN ID  $\rightarrow$  0x43F – 0x400 = 0x3F The count 0x3F is 000 0011 1111b in 11-bit binary format. For a range with extended CAN IDs the count needs to be 29-bit wide.

The mask is calculated out of negated count and a 11-bit mask:

mask = ~0x3F & 0x7FF = 0x7C0

For extended IDs you need a 29-bit mask:

mask = ~0x3F & 0x1FFF FFFF = 0x1FFF FFC0

#### Note:

If for count the first set bit is followed by unset bits on lower significant positions for the calculation of the mask these bits need to be set. For example a count of 0xA3 (1010 0011b) you need to calculate with the count 0xFF (1111 1111b). The consequence is that more CAN IDs are received as intended.

# 3.5.2 DLC check

The DLC check is executed for all received messages after they pass the search algorithm (PDU is in Rx list) or if they are defined to be received in FullCAN message objects. The feature DLC check can be activated only at Pre-compile time at all. If activated the DLC check can be configured for each Rx-PDU individually and can be reconfigured in the Post-build-loadable configuration phase.

The DLC check verifies if the received DLC is greater or equal to the DLC specified during configuration time. If the DLC is less than the configured one a DET error is raised and the reception of the PDU is abandoned.

#### 3.5.3 Data checksum Rx

This feature can be used to verify the validity of a Rx-PDU after reception. The Rx-PDU which shall be verified can be configured individually via the parameter CanIfRxPduDataChecksumPdu. The verification is application specific and must be implemented within the API CanIf\_RxIndicationSubDataChecksumRxVerify(). For further information please see the description of the prototype of this API in chapter 6.2.2.



The prototype of the indication function must match following signature:

void My DataChecksumRxErrFct (PduIdType CanIfRxPduId)

and can be accessed via the macro: CanIf\_GetDataChecksumRxErrFctPtr() (see file CanIf Cfg.h)

It is recommended to call this indication function with the identifier of affected Rx-PDU. Therefor the value of parameter <code>CanIfRxPduId</code> should be used which is passed by call of <code>CanIf\_RxIndicationSubDataChecksumRxVerify()</code>. The value of this parameter is a CAN interface internal identifier which corresponds to value of configuration parameter <code>CanIfRxPduId</code>. Corresponding macros are generated per Rx-PDU into file <code>CanIf Cfg.h</code>. These ones can be used by application (s. example below).



#### Caution

Please use these macros wisely. They can change in case of configuration variant Post-build-loadable.

For further information about configuration of this feature at all please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the description of mentioned parameters.

# 3.5.4 Control of reception mode of a Rx-PDU

This feature provides the ability to control the reception mode of a Rx-PDU at runtime. The reception mode can be set per Rx-PDU individually at runtime via the API:  $Canlf\_SetPduReceptionMode()$ . In order to address a Rx-PDU you can use the corresponding symbolic name value which can be found in file  $Canlf\_Cfg.h$  (s. example below).



For further information about this API please see chapter 6.1.40. This feature can be used for e.g. either to receive a CAN-message as a Rx-PDU with an explicit CAN-identifier or as a Rx-range-PDU. In case of the configured CAN-identifier of a Rx-PDU fits the range of CAN-identifiers of a Rx-range-PDU on the same CAN-channel as well. In case of a FullCAN-Rx-PDU the reception can be controlled at runtime at all.

This feature can be enabled via the parameter <code>CanIfSetPduReceptionModeSupport</code>. In addition Rx-PDUs whose reception mode is intended to be controlled at runtime must be configured accordingly via the parameter <code>CanIfRxPduSetReceptionModePdu</code>.

For further information about configuration of this feature at all please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the description of mentioned parameters.

#### 3.6 Communication Modes

The CAN Interface knows two main types of communication modes.

#### 3.6.1 Controller Mode

The controller mode represents the physical state of the CAN controller. The following modes are available:

- CANIF CS STOPPED
- CANIF CS STARTED
- ► CANIF CS SLEEP
- ► CANIF CS UNINIT

There is no state called bus off. Bus off is treated as a transition from STARTED to STOPPED mode. All transitions have to be initiated using the API function CanIf\_SetControllerMode(). The controller mode can be switched for each controller independent of the state of other controllers in the system.

The state <code>CANIF\_CS\_UNINIT</code> is left after <code>CanIf\_InitController()</code> is called and can only be entered by a reset of the ECU.

The modes <code>CANIF\_CS\_SLEEP</code> and <code>CANIF\_CS\_STARTED</code> can only be entered from <code>CANIF\_CS\_STOPPED</code>. This means a transition from STARTED to SLEEP and vice versa is not possible without requesting the STOPPED mode first.

It is always possible to request the current active controller mode by calling the API  $CanIf\_GetControllerMode()$ .

# 3.6.2 **PDU Mode**

The other type of communication mode is completely processed by software (it does not represent any state of the hardware). Transitions of the PDU mode are only possible if the controller mode is set to <code>CANIF\_CS\_STARTED</code>.

The following PDU modes are available:



CANIF GET OFFLINE

Rx and Tx path are switched offline

► CANIF GET RX ONLINE

Rx path online, Tx path offline

► CANIF GET TX ONLINE

Rx path offline, Tx path online

► CANIF GET ONLINE

Rx and Tx path are switched online

► CANIF GET OFFLINE ACTIVE

Rx and Tx path offline, confirmation is emulated by the CAN Interface

► CANIF GET OFFLINE ACTIVE RX ONLINE

Rx path online, Tx path offline, confirmation is emulated by the CAN Interface

If parameter CanIfPnWakeupTxPduFilterSupport (s. chapter 3.16) is enabled then the following two further modes are available:

- CANIF GET TX ONLINE WAKF

Rx path offline, tx path online

CANIF\_GET\_ONLINE\_WAKF

Rx and Tx path are switched online

The difference to the modes CANIF\_GET\_ONLINE and CANIF\_GET\_TX\_ONLINE is that the Tx-PDU filter is activated if the PDU mode is changed to one of these two modes. (s. chapter 3.16).



#### Caution

If one of the modes CANIF\_GET\_TX\_ONLINE\_WAKF or CANIF\_GET\_ONLINE\_WAKF is left by calling of CanIf\_SetPduMode() with parameter PduModeRequest which equals CANIF\_SET\_OFFLINE or CANIF\_SET\_TX\_OFFLINE or CANIF\_SET\_TX\_OFFLINE\_ACTIVE or CANIF\_SET\_ONLINE or CANIF\_SET\_TX\_ONLINE then the Tx-PDU Filter is deactivated!

The PDU modes can be set via the function  $CanIf\_SetPduMode()$  and can be retrieved via the function  $CanIf\_GetPduMode()$ .

# 3.7 Polling

The CAN Interface can process events in polling and interrupt mode. As the polling of events is executed by other layers (e.g. CAN Driver, Transceiver Driver) the CAN Interface is notified by call back functions which are called in the corresponding context.





#### Info

There is no need for changes in the configuration to run the CAN Interface in polling mode.

#### 3.8 CAN FD

The CAN Interface supports CAN FD. The configuration can be performed both for Rx- and Tx-PDUs. Therefor please configure the attribute <code>CanIfRxPduCanIdType</code> (Rx-PDU) and <code>CanIfTxPduCanIdType</code> (Tx-PDU) accordingly as required by your application. In case of Rx-PDUs the message type (e.g. FD or not-FD) is evaluated during the Rx-search algorithm. Hence it is possible to handle two messages with the same CAN identifier, at which one is configured as FD and one as not-FD and to map them to different Rx-PDUs.



#### **Expert Knowledge**

If you intend to switch the baudrate of the CAN hardware at runtime it is suggested to use the API CanIf SetBaudrate instead of CanIf ChangeBaudrate.

Rx- and Tx-FD-PDUs with up to 64 bytes payload are supported.



# **Basic Knowledge**

If you intend to configure BasicCAN-FD-Tx-PDUs and the Tx-buffer is enabled in your configuration please ensure that attribute CanIfStaticFdTxBufferSupport is enabled.

## 3.9 Meta data Rx- / Tx-support

If this feature is enabled the CAN Interface supports the handling of dynamic CAN-identifiers by using of SDU meta data. Such dynamic PDU can be configured by parameter MetaDataLength. This parameter can be found in the container of corresponding global PDU.

In case of configuration variant Link-time or Post-build loadable please enable this feature by setting of parameter <code>CanIfMetaDataSupport</code> to true. In case of configuration variant Pre-compile the activation/deactivation of this feature is determined from the configuration of Rx- and Tx-PDUs. If there is any PDU which has configured the parameter <code>MetaDataLength</code> then this feature is enabled else disabled.

## 3.10 J1939 dynamic address support

If this feature is enabled the CAN Interface translates the addresses (CAN identifiers) of Rx- and Tx-PDUs according to J1939 by using of dynamic address lookup tables. These tables are maintained by J1939Nm by using of following APIs:

> CanIf SetAddressTableEntry and



CanIf ResetAddressTableEntry.

This feature has to be configured for each CAN channel individually by the parameter <code>CanIfCtrlJ1939DynAddrSupport</code>. Please consider that in case of configuration variant Post-build loadable and configuration phase Post-build the value which you can select by <code>CanIfCtrlJ1939DynAddrSupport</code> is limited by value of <code>CanIfJ1939DynAddrSupport</code> which was set at configuration phase Pre-compile. Therefore in case of configuration variant Post-build loadable please first enable this feature as far as you need at all by the parameter <code>CanIfJ1939DynAddrSupport</code> and then configure the channel specific parameter of this feature. In case of configuration variant Pre-compile it is only possible to configure the channel specific parameter.



#### Caution

The feature J1939 dynamic address support works only if all Rx-PDUs of the CAN channel at which this feature is enabled are configured as BasicCANs and if all the corresponding hardware filters are opened completely!

#### 3.11 Error Notification

AUTOSAR specifies two mechanisms of error notification and reporting. Only DET reporting is supported by the CAN Interface and can be activated at configuration time (Pre-compile configuration).

Development errors are reported to DET using the service <code>Det\_ReportError().This</code> feature is normally activated during the development phase to detect fatal errors in configuration and integration of the CAN Interface with other layers.

The reported CAN Interface ID is 60.

The reported service IDs identify the services which are described in chapter 6. The following table presents the service IDs and the related services:

Service ID	Service
1	CanIf_Init
2	CanIf_InitController
3	CanIf_SetControllerMode
4	CanIf_GetControllerMode
5	CanIf_Transmit
6	CanIf_ReadRxPduData
9	CanIf_SetPduMode
10	CanIf_GetPduMode
11	CanIf_GetVersionInfo
12	CanIf_SetDynamicTxId
13	CanIf_SetTrcvMode
14	CanIf_GetTrcvMode
15	CanIf_GetTrcvWakeupReason



Service ID	Service
16	CanIf_SetTrcvWakeupMode
17	CanIf_CheckWakeup
18	CanIf_CheckValidation
19	CanIf_TxConfirmation
20	CanIf_RxIndication
21	CanIf_CancelTxConfirmation
22	CanIf_ControllerBusoff
23	CanIf_ControllerModeIndication
24	CanIf_TrcvModeIndication
25	CanIf_GetTxConfirmationState
26	CanIf_ConfirmPnAvailability
27	CanIf_ChangeBaudrate
28	CanIf_CheckBaudrate
30	CanIf_ClearTrcvWufFlag
31	CanIf_CheckTrcvWakeFlag
32	CanIf_ClearTrcvWufFlagIndication
33	CanIf_CheckTrcvWakeFlagIndication
39	CanIf_SetBaudrate
250	CanIf_CancelTransmit
251	CanIf_CancelTxNotification

Table 3-2 Mapping of service IDs to services

# The errors reported to DET are described in the following table:

Error Code		Description
10	CANIF_E_PARAM_CANID	The error code is used if an invalid CAN identifier is passed to the CAN Interface from the CAN driver during the reception of a Rx-PDU.  The error can be raised from:
		- CanIf_RxIndication
		- CanIf_SetDynamicTxId
11	CANIF_E_PARAM_DLC	The error will be reported by
		- CanIf_RxIndication
		if a DLC greater than 8 is passed to the CAN Interface during reception.
12	CANIF_E_PARAM_HRH	The error code is used in the function
		- CanIf_RxIndication
		If an invalid hardware receive handle is passed to the CAN Interface.
13	CANIF_E_PARAM_LPDU	The error will be raised by the following functions if an unexpected Pduld is passed to the function by



Erro	r Code	Description
		either the CAN Driver or the higher layer.
		- CanIf TxConfirmation
		- CanIf CancelTxConfirmation
		- CanIf CancelTransmit
		- CanIf CancelTxNotification
14	CANTE E DADAM CONTROLLED	_
14	CANIF_E_PARAM_CONTROLLER	Used by the following functions if an invalid controller index is passed:
		- CanIf_ControllerBusOff
		- CanIf_ResetBusOffStart
		- CanIf_ResetBusOffEnd
		- CanIf_ControllerModeIndication
		- CanIf_GetTxConfirmationState
15	CANIF_E_PARAM_CONTROLLERID	Used by the following functions if an invalid controller index is passed:
		- CanIf SetControllerMode
		- CanIf GetControllerMode
		- CanIf SetPduMode
		- CanIf GetPduMode
		- CanIf CheckBaudrate
		- CanIf ChangeBaudrate
		- CanIf_SetBaudrate
16	CANIF_E_PARAM_WAKEUPSOURCE	Used by the following functions if an invalid wakeup source is passed:
		- CanIf CheckValidation
		- CanIf_CheckWakeup
17	CANIF_E_PARAM_TRCV	Used by the following functions if an invalid transceiver ID is passed:
		- CanIf TrcvModeIndication
		- CanIf GetTrcvWakeupReason
		- CanIf GetTrcvMode
		- CanIf SetTrcvMode
		- CanIf SetTrcvWakeupMode
		- CanIf ConfirmPnAvailability
		- CanIf ClearTrcvWufFlagIndication
		- CanIf CheckTrcvWakeFlagIndication
		- CanIf ClearTrcvWufFlag
		- CanIf CheckTrcvWakeFlag
18	CANIF_E_PARAM_TRCVMODE	Used by the following functions if an invalid transceiver mode is passed:
		- CanIf SetTrcvMode
19	CANIF_E_PARAM_TRCVWAKEUPMO	Used by the following functions if an invalid transceiver wakeup mode is passed:
		- CanIf SetTrcvWakeupMode
		January Managerioac



The error is raised if a NULL pointer is passed to one of the following functions:  - CanIf_Init - CanIf_ExInit - CanIf_ExIndication - CanIf_ExPARAM_CALL CANIF_EXPLIPMENT CANIF_EXPLOR_EXPL	Error Code Des		Description
of the following functions:  - CanIf_Init - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetProwWakeupReason - CanIf_GetTrowMode - CanIf_CancelTxConfirmation  The error is raised if an invalid parameter ControllerMode is passed to the function: - CanIf_SetControllerMode  The error is raised if one of the following API functions is called before the CAN Interface is initialized: - CanIf_SetController - CanIf_Transmit - CanIf_Transmit - CanIf_Transmit - CanIf_ControllerBusOff - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_CheckValidation - CanIf_SetDynamictxId - CanIf_SetDyna			•
- CanIf_GetControllerMode - CanIf_Transmit - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetTrcvWakeupReason - CanIf_GetTrcvWakeupReason - CanIf_GetTrcvWakeupReason - CanIf_GetTrcvMode - CanIf_SetControllerMode  30 CANIF_E_UNINIT  The error is raised if one of the following API functions is called before the CAN interface is initialized: - CanIf_InitController - CanIf_Transmit - CanIf_Transmit - CanIf_Transmit - CanIf_Transmit - CanIf_GetPduMode - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWadeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_CancelTransmit - Ca	20	CANTE E TANAM TOTHTEN	· · ·
- CanIf_Transmit - CanIf_RIndication - CanIf_GetPduMode - CanIf_GetVersionInfo - CanIf_GetTrcvWakeupReason - CanIf_GetTrcvWode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTxConfirmation  The error is raised if an invalid parameter ControllerMode is passed to the function: - CanIf_SetControllerMode  The error is raised if one of the following API functions is called before the CAN Interface is initialized: - CanIf_InitController - CanIf_Transmit - CanIf_Txconfirmation - CanIf_Txconfirmation - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_CheckWakeupMode - CanIf_CheckWakeupMode - CanIf_CheckWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetDynamicTxId - CanIf_SetControllerModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_CancelTxnotification - CanIf_SetTrcvWode - CanIf_CancelTransmit - CanIf_CheckTrcvWakeFlagIndication - CanIf_CheckTrcvWakeFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_Init
- CanIf_RxIndication - CanIf_GetPduMode - CanIf_GetVersionInfo - CanIf_GetTrcvWakeupReason - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_CancelTxConfirmation  The error is raised if an invalid parameter ControllerMode is passed to the function: - CanIf_SetControllerMode  30 CANIF_E_UNINIT  The error is raised if one of the following API functions is called before the CAN Interface is initialized: - CanIf_InitController - CanIf_Transmit - CanIf_TxConfirmation - CanIf_RxIndication - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupReason - CanIf_SetDynamicTxId - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetTrcvWode - CanIf_CancelTxNotification - CanIf_SetTrcvWode - CanIf_CancelTransmit - CanIf_ClearTrcvWufeFlagIndication - CanIf_ClearTrcvWufeFlagIndication - CanIf_ClearTrcvWufeFlagIndication			- CanIf_GetControllerMode
- CanIf_GetPduMode - CanIf_GetVersionInfo - CanIf_GetTrcvWakeupReason - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTxConfirmation  The error is raised if an invalid parameter ControllerMode is passed to the function: - CanIf_SetControllerMode  The error is raised if one of the following API functions is called before the CAN Interface is initialized: - CanIf_InitController - CanIf_Transmit - CanIf_TxConfirmation - CanIf_ExtPduMode - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_GetPduMode - CanIf_CetCkWakeup - CanIf_CetCkWakeup - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetControllerModeIndication - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_GetTrcvWode - CanIf_CancelTxnotification - CanIf_SetTrcvWode - CanIf_CancelTxnotification - CanIf_CancelTxnotification - CanIf_CancelTransmit - CanIf_ClearTrcvWufflagIndication - CanIf_ClearTrcvWufflagIndication - CanIf_ClearTrcvWufflagIndication - CanIf_ClearTrcvWakeFlagIndication			- CanIf_Transmit
- CanIf_GetVersionInfo - CanIf_GetTrcvWakeupReason - CanIf_GetTrcvMode - CanIf_CancelTxCOnfirmation  The error is raised if an invalid parameter ControllerMode is passed to the function: - CanIf_SetControllerMode  30 CANIF_E_UNINIT  The error is raised if one of the following API functions is called before the CAN Interface is initialized: - CanIf_InitController - CanIf_Transmit - CanIf_TxConfirmation - CanIf_TxConfirmation - CanIf_ControllerBusOff - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_GetCwakeupp - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTynamicTxId - CanIf_SetDynamicTxId - CanIf_SetDynamicTxId - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetTrcvWodeIndication - CanIf_SetTrcvWode - CanIf_GetTrcvWode - CanIf_GetTrcvMode - CanIf_CancelTxnotification - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ClearTrcvWufFlagIndication - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_RxIndication
- CanIf_GetTrovWakeupReason - CanIf_GetTrovMode - CanIf_GetTrovMode - CanIf_GetTrovMode - CanIf_CancelTxConfirmation  The error is raised if an invalid parameter ControllerMode is passed to the function: - CanIf_SetControllerMode  The error is raised if one of the following API functions is called before the CAN Interface is initialized: - CanIf_InitController - CanIf_Transmit - CanIf_Transmit - CanIf_Txconfirmation - CanIf_ControllerBusOff - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_SetTrovWakeupReason - CanIf_SetTrovWakeupRode - CanIf_SetDynamicTxId - CanIf_SetDynamicTxId - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetTrovWode - CanIf_CancelTxNotification - CanIf_SetTrovWode - CanIf_CancelTxnotification - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWukeFlagIndication			- CanIf_GetPduMode
- CanIf_GetTrcvMode - CanIf_CancelTxConfirmation  The error is raised if an invalid parameter ControllerMode is passed to the function: - CanIf_SetControllerMode  The error is raised if one of the following API functions is called before the CAN Interface is initialized: - CanIf_InitController - CanIf_Transmit - CanIf_TxConfirmation - CanIf_RxIndication - CanIf_SetPduMode - CanIf_ControllerBusOff - CanIf_CancelTxConfirmation - CanIf_CancelTxConfirmation - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_CheckWakeupReason - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetControllerModeIndication - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvWode - CanIf_CancelTrnoxmit - CanIf_CancelTrnoxmit - CanIf_CancelTrnoxmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_ClearTrcvWufFlagIndication			- CanIf_GetVersionInfo
- CanIf_CancelTxConfirmation  The error is raised if an invalid parameter ControllerMode is passed to the function: - CanIf_SetControllerMode  The error is raised if one of the following API functions is called before the CAN Interface is initialized: - CanIf_InitController - CanIf_TxConfirmation - CanIf_TxConfirmation - CanIf_TxConfirmation - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetDynamicTxId - CanIf_SetDynamicTxId - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetTrcvWode - CanIf_SetTrcvWode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_CancelTxnotification - CanIf_SetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication			- CanIf_GetTrcvWakeupReason
The error is raised if an invalid parameter ControllerMode is passed to the function:  - CanIf_SetControllerMode  The error is raised if one of the following API functions is called before the CAN Interface is initialized:  - CanIf_InitController  - CanIf_Transmit  - CanIf_Transmit  - CanIf_ExIndication  - CanIf_SetPduMode  - CanIf_SetPduMode  - CanIf_ControllerBusOff  - CanIf_CancelTxConfirmation  - CanIf_CheckWakeup  - CanIf_CheckWakeup  - CanIf_CheckValidation  - CanIf_SetTrcvWakeupReason  - CanIf_SetTrcvWakeupReason  - CanIf_SetTrcvWakeupMode  - CanIf_SetTrcvWakeupMode  - CanIf_SetControllerModeIndication  - CanIf_SetControllerMode  - CanIf_SetControllerMode  - CanIf_SetControllerMode  - CanIf_SetTrcvWode  - CanIf_SetTrcvWode  - CanIf_CancelTxnotification  - CanIf_SetTrcvMode  - CanIf_CancelTransmit  - CanIf_CancelTransmit  - CanIf_ClearTrcvWufFlagIndication  - CanIf_ClearTrcvWufFlagIndication  - CanIf_ClearTrcvWufFlagIndication			- CanIf_GetTrcvMode
ControllerMode is passed to the function:			- CanIf_CancelTxConfirmation
The error is raised if one of the following API functions is called before the CAN Interface is initialized:  - CanIf_InitController - CanIf_Transmit - CanIf_TxConfirmation - CanIf_RxIndication - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetDynamicTxId - CanIf_SetDynamicTxId - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetTrcvWode - CanIf_SetTrcvWode - CanIf_SetTrcvWode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_ClearTrcvWakeFlagIndication	21	CANIF_E_PARAM_CTRLMODE	
functions is called before the CAN Interface is initialized:  - CanIf_InitController - CanIf_Transmit - CanIf_Transmit - CanIf_TxConfirmation - CanIf_RxIndication - CanIf_ControllerBusOff - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckWakeup - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetTprowIndication - CanIf_SetDynamicTxId - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ClearTrcvWufFlagIndication - CanIf_ClearTrcvWufFlagIndication			- CanIf_SetControllerMode
- CanIf_Transmit - CanIf_TxConfirmation - CanIf_RxIndication - CanIf_ControllerBusOff - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWadeIndication - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_ClearTrcvWakeFlagIndication	30	CANIF_E_UNINIT	functions is called before the CAN Interface is
- CanIf_TxConfirmation - CanIf_RxIndication - CanIf_ControllerBusOff - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckWalidation - CanIf_CheckValidation - CanIf_SetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_ClearTrcvWufFlagIndication			- CanIf_InitController
- CanIf_RxIndication - CanIf_ControllerBusOff - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetDynamicTxId - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_ClearTrcvWufFlagIndication			- CanIf_Transmit
- CanIf_ControllerBusOff - CanIf_SetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetTrcvWakeupMode - CanIf_SetDynamicTxId - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_TxConfirmation
- CanIf_SetPduMode - CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_ControllerModeIndication - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_ClearTrcvWufFlagIndication			- CanIf_RxIndication
- CanIf_GetPduMode - CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_SetDynamicTxId - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetTrcvMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_CancelTxnotification - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_ControllerBusOff
- CanIf_CancelTxConfirmation - CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_ControllerModeIndication - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_CancelTxnotification - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_SetPduMode
- CanIf_CheckWakeup - CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_ControllerModeIndication - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_GetTrcvMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_ConcelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_GetPduMode
- CanIf_CheckValidation - CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_ControllerModeIndication - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_CheckTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_CancelTxConfirmation
- CanIf_GetTrcvWakeupReason - CanIf_SetTrcvWakeupMode - CanIf_ControllerModeIndication - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_CheckWakeup
- CanIf_SetTrcvWakeupMode - CanIf_ControllerModeIndication - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_CheckTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_CheckValidation
- CanIf_ControllerModeIndication - CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_GetTrcvWakeupReason
- CanIf_SetDynamicTxId - CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_SetTrcvWakeupMode
- CanIf_TrcvModeIndication - CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_ControllerModeIndication
- CanIf_SetControllerMode - CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_SetDynamicTxId
- CanIf_GetControllerMode - CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_TrcvModeIndication
- CanIf_CancelTxNotification - CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_SetControllerMode
- CanIf_SetTrcvMode - CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_GetControllerMode
- CanIf_GetTrcvMode - CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_CancelTxNotification
- CanIf_CancelTransmit - CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_SetTrcvMode
- CanIf_ConfirmPnAvailability - CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_GetTrcvMode
- CanIf_ClearTrcvWufFlagIndication - CanIf_CheckTrcvWakeFlagIndication			- CanIf_CancelTransmit
- CanIf_CheckTrcvWakeFlagIndication			- CanIf_ConfirmPnAvailability
- CanIf_CheckTrcvWakeFlagIndication			- CanIf_ClearTrcvWufFlagIndication
~			- CanIf_CheckTrcvWakeFlagIndication
- Canli_ClearTrcvWufFlag			- CanIf_ClearTrcvWufFlag



Error Code		Description
		- CanIf_CheckTrcvWakeFlag
		- CanIf_GetTxConfirmationState
		- CanIf_CheckBaudrate
		- CanIf_ChangeBaudrate
		- CanIf_SetBaudrate
40	CANIF_E_NOK_NOSUPPORT	Not used.
50	CANIF_E_INVALID_TXPDUID	Used by the following functions if an invalid Tx PDU ID is passed:
		- CanIf_CancelTransmit
		- CanIf_SetDynamicTxId
		- CanIf_Transmit
61	CANIF_E_INVALID_DLC	Used by the function <code>CanIf_HlIndication</code> if the received DLC is smaller than the configured one.
70	CANIF_E_STOPPED	Used by the function <code>CanIf_Transmit</code> if the function is called while either the controller mode is <code>STOPPED</code> or the PDU mode is <code>OFFLINE</code> .
71	CANIF_E_NOT_SLEEP	Used by the function <code>CanIf_CheckWakeup</code> if the function is called while the controller mode is not <code>SLEEP</code> or <code>STOPPED</code> .
Addi	tionally defined error codes (not AUTO	SAR compliant)
45	CANIF_E_CONFIG	The error code CANIF_E_CONFIG is used to detect inconsistent data in the generated files due to misconfiguration.
		The error can be raised in context of following functions:
		- CanIf_RxIndication
51	CANIF_E_FULL_TX_BUFFER_FIFO	The error code informs that the transmit-buffer of handling type FIFO is full and that no further Tx-PDUs can be buffered within.
		The error can be raised in context of following functions:
		- CanIf_Transmit

Table 3-3 Errors reported to DET



## Caution

If the development error detection is disabled not only the reporting of the errors is suppressed but also the detection i.e. the verification of valid function parameters.



# 3.12 Transceiver handling

The CAN Interface provides APIs and call back functions to control as many transceivers as CAN controllers are available in the system. The transceiver handling has to be activated at pre-compile time.

The CAN Interface provides the following functions for higher layers to control the behavior of the transceiver.

- CanIf SetTrcvMode()
- ► CanIf TrcvModeIndication()
- CanIf GetTrcvMode()
- CanIf GetTrcvWakeupReason()
- CanIf SetTrcvWakeupMode()

Additionally the following APIs are provided in order to control a partial networking CAN transceiver.

- CanIf CheckTrcvWakeFlag()
- CanIf CheckTrcvWakeFlagIndication()
- CanIf ClearTrcvWufFlag()
- CanIf ClearTrcvWufFlagIndication()
- CanIf ConfirmPnAvailability()

The initialization of the transceiver driver itself is not executed by the CAN Interface. This means the calling layer has to make sure the transceiver driver is initialized before using the listed API functions.

If more than one different transceiver driver is used in the system the CAN Interface provides a mapping to address the correct transceiver driver with the correct parameters. The parameter <code>CanIfTransceiverMapping</code> has to be activated to control more than one transceiver driver.

It is also allowed to activate the parameter <code>CanIfTransceiverMapping</code> if only one transceiver driver is used in the system. Because of additional runtime it is suggested to deactivate this feature in this use case.

The CAN Interface supports the detection of wake up events raised by a transceiver. The feature "Wakeup Support" has to be activated and a wakeup source has to be configured for the corresponding transceiver channel.

Within the API <code>CanIf\_CheckWakeup()</code> the CAN Interface analyses the passed wakeup source parameter and decides whether a CAN Controller or a CAN Transceiver has to be requested for a pending wake up event.

For more details refer to the chapter 3.13 Sleep / WakeUp.



# 3.13 Sleep / WakeUp

The CAN Interface controls the modes of the underlying CAN driver and transceiver driver.

The API  $CanIf\_SetControllerMode()$  has to be used to change the mode of the CAN controller while the CAN transceiver can be controlled with the API  $CanIf\_SetTrcvMode()$ .



#### Caution

The CAN Interface itself does not perform any checks whether the CAN controller and the CAN transceiver are set to sleep consistently and in the correct sequence. It is up to the higher layer to call <code>CanIf\_SetControllerMode()</code> and <code>CanIf\_SetTrcvMode()</code> in the correct sequence.

Wake up events can be raised either by the CAN controller or by the CAN transceiver. In both cases the CAN Interface is not directly informed about state changes. This means the higher layers (normally the EcuM) has to call the API <code>CanIf\_CheckWakeup()</code> with the wakeup sources configured for CAN transceiver or CAN controller (1).

The CAN Interface decides by analyzing the passed wakeup source whether the CAN controller or the CAN transceiver driver has to be checked for a pending wakeup (2 or 2').

The following figure illustrates the described wake up sequence:

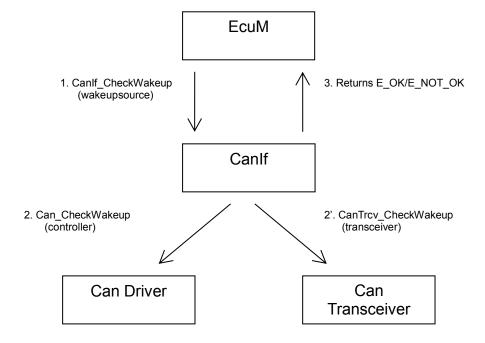


Figure 3-4 Wake up sequence (No validation)

If the parameter "CanIfPublicWakeupCheckValidSupport" is enabled the following figure shows the sequence which has to be executed for a valid wake up. Steps 1 to 3 take place as described above.



After the call of <code>EcuM\_SetWakeupEvent()</code> the CAN Interface has to be set to the state <code>CANIF\_CS\_STARTED</code> to be able to receive messages. These messages won't be passed to upper layers by the CAN Interface because the PDU-mode is still set to <code>OFFLINE</code>. The state change which sets the CAN Interface to the mode <code>STARTED</code> has to be realized by the call of the API <code>CanIf\_SetControllerMode()</code> with mode <code>CANIF\_CS\_STARTED(5)</code> from the function <code>EcuM\_StartWakeupSources()</code> (4). If the wake up was detected by the transceiver the CAN controller has to be woken up internally. This means the call <code>CanIf\_SetControllerMode()</code> with mode <code>CANIF\_CS\_STOPPED</code> is necessary in (5) before the transition to mode <code>STARTED</code> is executed.

If the wake up is initiated by the CAN controller the corresponding transceiver channel has to be set to mode NORMAL and the CAN controller has to be set to mode STARTED.

If the wake up is initiated by a transceiver channel the CAN controller has to be woken up internally. This means an additional call of <code>CanIf\_SetControllerMode()</code> with mode <code>CANIF\_CS\_STOPPED</code> has to be executed to wake up the CAN controller before the transition to mode <code>STARTED</code> is initiated. (Depending on the behavior of the transceiver the CAN controller and the configuration itself it is possible to wake up both the CAN controller and the transceiver channel externally.)

Next the EcuM starts a time out for the wake up validation. This means if a message is received within this timeout (6) the call of <code>CanIf\_CheckValidation()</code> executed by the EcuM (7) will result in a successful validation. The CAN Interface checks for a recent Rx event (6) which occurred after the wake up and notifies the EcuM by calling of <code>EcuM ValidationWakeupEvent()</code>.

If there is no message reception after (5) the function <code>CanIf\_CheckValidation()</code> has been called no successful wake up validation won't be notified and the EcuM will run into a timeout. In this case the EcuM calls <code>EcuM\_StopWakeupSources()</code> (8') and the CAN Driver and CAN transceiver have to be set to mode <code>SLEEP</code> again.



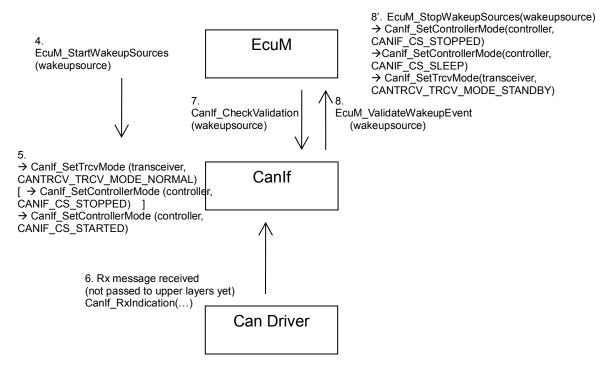


Figure 3-5 Wake up sequence (Wakeup validation)

During the wake up sequence as well as during the transition to mode SLEEP, the higher layers have to take care about the sequence of the state transitions affecting the CAN controller (CAN driver) and the Transceiver driver.

Since ASR4.0R3 it is configurable on whether only a received CanNm-message is able to do the validation.

#### 3.14 Bus Off

The CAN Interface handles bus off events notified by the CAN Driver in interrupt driven or polling systems. If a bus off event is raised the CAN Driver forwards it to the CAN Interface by calling the function <code>CanIf ControllerBusOff()</code>.

The CAN Interface switches its internal controller state from STARTED to STOPPED and the PDU mode is set to OFFLINE.

In this state no reception and no transmission is possible until the CAN Interface's controller state and as a result the CAN Controller's bus off state is recovered by the call of the function  $CanIf\_SetControllerMode()$  for the affected channel by the higher layer.

After the controller state is switched the bus off state is recovered. For successful reception and transmission the PDU mode has to be switched to RX\_ONLINE, TX\_ONLINE or ONLINE by the higher layer.



#### 3.15 Version Info

The version of the CAN Interface module can be acquired in three different ways. The first possibility is by calling of the function <code>CanIf\_GetVersionInfo()</code>. This function returns the module's version in the structure <code>Std\_VersionInfoType</code> which includes the VendorID and the ModuleID additionally.

The second possibility is the access of version defines which are specified in the header file CanIf.h.

The following defines can be evaluated to access different versions:

#### AUTOSAR version:

- CANIF AR RELEASE MAJOR VERSION
- CANIF AR RELEASE MINOR VERSION
- ► CANIF AR RELEASE PATCH VERSION

#### Module version:

- ► CANIF SW MAJOR VERSION
- CANIF SW MINOR VERSION
- ► CANIF SW PATCH VERSION

#### ▶ Module ID:

- ► CANIF\_MODULE\_ID
- ▶ Vendor ID:
  - ► CANIF VENDOR ID

There is a third possibility to at least acquire the SW version by accessing globally visible constants:

- ► CanIf MainVersion
- CanIf SubVersion
- ► CanIf ReleaseVersion



#### Info

The API <code>CanIf\_GetVersionInfo()</code> is only available if enabled at Pre-compile time. The definitions can be accessed independent of the configuration.

# 3.16 Partial Networking

This feature consists of two sub-features:



- ► Wakeup Tx-PDU filter (parameter: CanIfPnWakeupTxPduFilterSupport)
- ► Handling of a partial networking transceiver (parameter: CanIfPnTrcvHandlingSupport)

The mentioned sub-features can be used only if the attribute CanIfPublicPnSupport is enabled. See the following table for more information about mentioned sub-features.

Feature	Description
CanIfPnWakeupTxPduFilterSupport	Tx-PDU filter which is activated if the PDU mode is changed either to CANIF_SET_ONLINE_WU_FILTER or to CANIF_SET_TX_ONLINE_WU_FILTER. This filter is active until the first Tx-confirmation / Rx-indication of the corresponding CAN channel arrives. Only certain Tx-PDUs which are labeled as Tx wakeup filter PDUs (s. parameter CanIfTxPduPnFilterPdu) can pass the filter. All Tx-requests of other Tx-PDUs are refused by CAN Interface until the filter is disabled.
CanIfPnTrcvHandlingSupport	Handling of a partial networking transceiver

Table 3-4 Sub-features of feature Partial Networking

The parameter <code>CanIfPnTrcvHandlingSupport</code> is enabled automatically if at least one underlying transceiver driver supports partial networking. In case of using the feature <code>CanIfPnWakeupTxPduFilterSupport</code> the <code>Tx-PDUs</code> which are allowed to pass the filter have to be configured accordingly. This kind of configuration can be performed individually for every <code>Tx-PDU</code> via the parameter <code>CanIfTxPduPnFilterPdu</code>.



#### Note

Please consider that the filter of a certain CAN channel is only active if at least one Tx-PDU of this CAN channel has the parameter CanIfTxPduPnFilterPdu enabled.

The feature CanIfPnWakeupTxPduFilterSupport is configurable in all three configuration variants:

- Pre-compile
- Link-time
- Post-build-loadable

Except the restriction that this feature has to be enabled at Pre-compile time at all there are no any further restrictions concerning the reconfiguration of this feature in accordance with the Tx-PDUs which may pass the filter in case of a Link-time or a Post-build-loadable configuration variant.



# 3.17 Services used by the CAN Interface

In the following table services provided by other components which are used by the CAN Interface are listed. For details about prototype and functionality refer to the documentation of the corresponding component.

Component	API
DET	Det_ReportError
CanDrv	Can_SetControllerMode
	Can_Write
PduR, CanNm, CanTp, CDD	User_TxConfirmation (*)
	User_RxIndication (*)
CanNm, EcuM, CDD	User_ControllerBusOff (*)
	User_ValidationWakeupEvent (*)
SchM	SchM_Enter_CanIf_##area
	SchM_Exit_CanIf_##area
CanTrcv	CanTrcv_SetOpMode
	CanTrcv_GetOpMode
	CanTrcv_GetBusWuReason
	CanTrcv_SetWakeupMode
	CanTrcv_CheckWakeup
MICROSAR extension (optional)	EcuM_BswErrorHook

Table 3-5 API functions used by the CAN Interface

## 3.18 Multiple CAN drivers

The CAN Interface supports multiple CAN drivers which are implemented according to AUTOSAR specification 4.1.1.

Different CAN drivers are addressed by using the values of attributes "VendorId" and "VendorApiInfix" defined in BSWMD file of corresponding CAN driver.

In order to ensure compatibility with this CAN Interface the following naming convention of APIs of CAN driver need to be provided.

The APIs of used CAN driver has to be named as follows:

<sup>\*</sup> Names of the call back functions can be configured freely.



# Basic CAN Driver APIs Can\_<VendorId>\_<VendorApiInfix>\_SetControllerMode Can\_<VendorId>\_<VendorApiInfix>\_Write Can\_<VendorId>\_<VendorApiInfix>\_CancelTx(\*) Can\_<VendorId>\_<VendorApiInfix>\_CheckWakeup(\*) Can\_<VendorId>\_<VendorApiInfix>\_CheckBaudrate(\*) Can\_<VendorId>\_<VendorApiInfix>\_ChangeBaudrate(\*) Can\_<VendorId>\_<VendorApiInfix>\_SetBaudrate(\*)

Table 3-6 Adapted CAN driver APIs (\* optional)

The following table lists APIs of CAN Interface which have to be called by a CAN driver in case of multiple CAN drivers are configured.

```
Basic CAN Driver APIs

CanIf_<VendorId>_<VendorApiInfix>_RxIndication
CanIf_<VendorId>_<VendorApiInfix>_TxConfirmation
CanIf_<VendorId>_<VendorApiInfix>_ControllerBusOff
CanIf_<VendorId>_<VendorApiInfix>_ControllerModeIndication
CanIf_<VendorId>_<VendorApiInfix>_CancelTxNotification
CanIf_<VendorId>_<VendorApiInfix>_CancelTxConfirmation
```

Table 3-7 APIs of CAN Interface which have to be used in multiple CAN driver configurations

#### 3.19 Extended RAM-check

This feature is configured via the parameter <code>CanIfExtendedRamCheckSupport</code>. For further information about configuration of this feature please refer to the help which can be found in the GUI of the DaVinci Configurator 5 and to the description of mentioned parameter.



#### 3.20 Critical Sections

The AUTOSAR standard provides with the BSW Scheduler a BSW module, which handles entering and leaving critical sections.

For more information about the BSW Scheduler please refer to [3]. When the BSW Scheduler is used the CAN Interface provides critical section codes that have to be mapped by the BSW Scheduler to following mechanism:

Critical Section Define	Description
CANIF_EXCLUSIVE_AREA_0	<pre>Usage inside CanIf_SetControllerMode()</pre>
	> Duration is short (< 10 instructions)
	> Call to Can_SetControllerMode()
CANIF_EXCLUSIVE_AREA_1	<pre>Usage inside CanIf_CancelTxConfirmation(), CanIf_CancelTransmit(), CanIf_ClearQueue()</pre>
	> Duration is short (< 10 instructions).
	> No calls inside
CANIF_EXCLUSIVE_AREA_2	<pre>Usage inside CanIf_TxConfirmation() and CanIf_CancelTxConfirmation()</pre>
	> Duration is medium (< 50 instructions).
	> Call to CanIf_TxQueueTreatment(),
	<pre>CanIf_TxQueueTransmit(), Can_Write(), .</pre>
CANIF_EXCLUSIVE_AREA_3	Usage inside CanIf_SetPduMode()
	> Duration is short (< 10 instructions).
	> Call to CanIf_ClearQueue()
CANIF_EXCLUSIVE_AREA_4	Usage inside CanIf_Transmit()
	> Duration is medium (< 50 instructions).
	> Call to Can_Write()
CANIF_EXCLUSIVE_AREA_5	Usage inside CanIf_SetDynamicTxId()
	> Duration is short (< 10 instructions).
	> Setting of dynamic CAN identifier
CANIF_EXCLUSIVE_AREA_6	<pre>Usage inside CanIf_SetAddressTableEntry() and CanIf_ResetAddressTableEntry()</pre>
	> Duration is short (< 10 instructions).
	> Setting of J1939 Rx- and Tx-address
	> No calls inside



CANIF_EXCLUSIVE_AREA_7	Usage inside CanIf_RxIndication()		
	> Duration is short (< 10 instructions).		
	> Consistent reading from J1939 Rx-address table		
	> No calls inside		

Table 3-8 Critical Section Codes

If the exclusive areas are entered the upper layer needs to make sure that the CAN interrupts are disabled. Additionally the following table describes which API of the CAN Interface must not be called during the corresponding area is entered. The CAN Interface API CanIf\_CancelTxNotification() / CanIf\_CancelTxConfirmation() is entered mostly via the CAN interrupt. In case of a platform which confirmation for a transmit cancellation needs to be polled the corresponding API (for example Can\_MainFunction\_Write()) must not be called if the corresponding lock area is entered.

	CANIF_EXCLUSI VE_ AREA_0	CANIF_EXCLUSI\ E_ AREA_1	CANIF_EXCLUSI\ E_ AREA_2	CANIF_EXCLUSI VE_ AREA_3	CANIF_EXCLUSI VE_ AREA_4	CANIF_EXCLUSI VE_ AREA_5	CANIF_EXCLUSI VE_ AREA_6	CANIF_EXCLUSI VE_ AREA_7
CanIf_Init								
CanIf_InitMemory								
CanIf_Transmit								
CanIf_CancelTransmit	-							
CanIf_SetControllerMode	-	-	-	-	-			
Canlf_CancelTxNotification/ Canlf_CancelTxConfirmation								
CanIf_SetPduMode	-	-	-	-	-			
CanIf_TxConfirmation	-			-	-			
Canlf_ControllerBusOff								
CanIf_RxIndication								
CanIf_SetAddressTableEntry					-		-	-
CanIf_ResetAddressTableEntry								

Table 3-9 Restrictions for the different lock areas



# 4 Integration

This chapter gives necessary information for the integration of the MICROSAR CAN Interface into an application environment of an ECU.

#### 4.1 Files and include structure

The CAN Interface consists of the following files:

The delivery of the CAN Interface contains the files which are described in the chapters 4.1.1 and 4.1.2:

#### 4.1.1 Static Files

File Name	Description
CanIf.c	Implementation
CanIf.h	Header file, has to be included by higher layers to access the API
CanIf_Cbk.h	Header file, has to be included by underlying layers to access call back functions provided by the CAN Interface
CanIf_Types.h	Definition of types provided by the CAN Interface which have to be used by other layers. This file is included automatically if either CanIf.h or CanIf_Cbk.h is included.
CanIf_Hooks.h	This header file is included by <code>CanIf.c</code> and defines so called hook-macros. Every API of the CAN interface has an own pair of hook-macro. One of them is called at the beginning of each API and the other one at the end. The intention of these hook-macros is the ability to measure the execution time of an API. The hook-macros are defined to nothing by default. So they do not influence the execution of code by default.
CanIf_GeneralTypes.h	This header file is included by Can_GeneralTypes.h and contains the public types of the CAN Interface.

Table 4-1 Static files

#### 4.1.2 Dynamic Files

The dynamic files are generated by the configuration tool.

File Name	Description
CanIf_Cfg.h	Generated header file (included automatically by CanIf.h and CanIf_Cbk.h)
CanIf_Lcfg.c	Contains link time configuration data. Contains data in case of Pre-compile, Link-time and Post-build configuration variant.
CanIf_PBcfg.c	Contains post build configuration data. In case of Link-time variant is used, this file is empty.
CanIf_CanTrcv.h	Generated header file which includes the necessary header files of the transceiver drivers used in the system.

Table 4-2 Generated files



#### 4.2 Include Structure

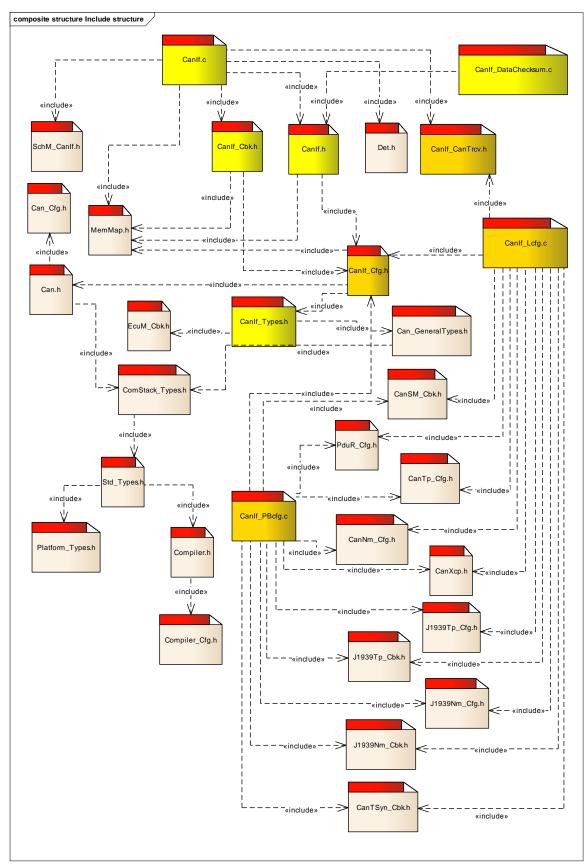


Figure 4-1 Include structure



#### 4.3 Compiler Abstraction and Memory Mapping

The objects (e.g. variables, functions, constants) are declared by compiler independent definitions – the compiler abstraction definitions. Each compiler abstraction definition is assigned to a memory section.

The following table contains the memory section names and the compiler abstraction definitions defined for the CAN Interface and illustrates their assignment among each other.

Compiler Abstraction Definitions  Memory Mapping Sections	CANIF_VAR_ZEROINIT	CANIF_VAR_INIT	CANIF_VAR_NOINIT	CANIF_CONST	CANIF_PBCFG	CANIF_CODE	CANIF_APPL_CODE	CANIF_APPL_VAR	CANIF_APPL_PBCFG	CANIF_VAR_PBCFG
CANIF_START_SEC_CODE CANIF_STOP_SEC_CODE						-				
CANIF_START_SEC_PBCFG CANIF_STOP_SEC_PBCFG					-					
CANIF_START_SEC_CONST_8BIT CANIF_STOP_SEC_CONST_8BIT				•						
CANIF_START_SEC_CONST_32BIT CANIF_STOP_SEC_CONST_32BIT										
CANIF_START_SEC_CONST_UNSPECIFIED CANIF_STOP_SEC_CONST_UNSPECIFIED				-						
CANIF_START_SEC_VAR_NOINIT_UNSPECIFIED CANIF_STOP_SEC_VAR_NOINIT_UNSPECIFIED		•								
CANIF_START_SEC_VAR_ZERO_INIT_UNSPECIFIED CANIF_STOP_SEC_VAR_ZERO_INIT_UNSPECIFIED		-								
CANIF_START_SEC_VAR_INIT_UNSPECIFIED CANIF_STOP_SEC_VAR_INIT_UNSPECIFIED		•								
CANIF_START_SEC_VAR_PBCFG CANIF_STOP_SEC_VAR_PBCFG										-

Table 4-3 Compiler abstraction and memory mapping

The Compiler Abstraction Definitions CANIF\_APPL\_CODE, CANIF\_APPL\_VAR and CANIF\_APPL\_PBCFG are used to address code, variables and constants which are declared by other modules and used by the CAN Interface.

These definitions are not mapped by the CAN Interface but by the memory mapping realized in the CAN Driver, CAN Transceiver Driver, PDU Router, Network management, Transport Protocol Layer, ECU State Manager and the CAN State manager.



# 5 Configuration

The CAN Interface is configured with DaVinci Configurator 5. Please refer to the help which can be found in the GUI of the configurator and to the descriptions of attributes in BSWMD file of CAN Interface.

## 5.1 Configuration of Post-Build

The configuration of post-build loadable is described in TechnicalReference PostBuildLoadable.pdf.



# **API Description**

#### Services provided by the CAN Interface 6.1

#### CanIf\_GetVersionInfo 6.1.1

Prototype					
<pre>void CanIf_GetVersionInfo( Std_VersionInfoType *VersionInfo );</pre>					
Parameter					
VersionInfo	Pointer to the structure including the version information.				
Return code					
-	-				
Functional Description					
CanIf_GetVersionInfo() returns version information, vendor ID and AUTOSAR module ID of the component.					
The versions are BCD-coded.					
Particularities and Limitations					
The function is only available if enabled at Pre-compile time (CANIF VERSION INFO API = STD ON)					

Table 6-1 API CanIf\_GetVersionInfo

#### Canlf\_Init 6.1.2

Prototype				
<pre>void CanIf_Init( const CanIf_ConfigType *ConfigPtr )</pre>				
Parameter				
ConfigPtr	Pointer to the structure including configuration data.			
Return code				
-	-			
Functional Description				
This function initializes global CAN Interface variables during ECU start-up.				
Particularities and Limitations				
This API has to be called during start-up before any CAN communication. Can_Init() has to be executed successfully.				

Table 6-2 API CanIf\_Init



#### Canlf\_SetControllerMode 6.1.3

Prototype				
Std_ReturnType CanIf_SetControllerMode(uint8 ControllerId, CanIf_ControllerModeType ControllerMode)				
Parameter				
ControllerId	The Controller to change mode.			
ControllerMode	Mode request.			
Return code				
Std_ReturnType	Returns whether the state transition was successful.			
Functional Description				
Request the mode of the specified channel. Supported modes: CANIF_CS_SLEEP, CANIF_CS_STOPPED, CANIF_CS_STARTED.				
Particularities and Limitations				
CAN Interface has to be initialized.				

API Canlf\_SetControllerMode Table 6-3

#### Canlf\_GetControllerMode 6.1.4

Prototype				
<pre>Std_ReturnType CanIf_GetControllerMode(uint8 ControllerId, CanIf_ControllerModeType *ControllerModePtr)</pre>				
Parameter				
ControllerId	Request mode of specified Controller.			
ControllerModePtr	Pointer to data type the information is stored in.			
Return code				
Std_ReturnType	Returns whether the state request was successful or not.			
Functional Description				
Acquire the current controller mode of the specified channel				
Particularities and Limitations				
CAN Interface has to be initialized.				

API Canlf\_GetControllerMode Table 6-4



#### Canlf\_Transmit 6.1.5

Prototype				
<pre>Std_ReturnType CanIf_Transmit(PduIdType CanTxPduId, const PduInfoType *PduInfoPtr)</pre>				
Parameter				
CanTxPduId	Handle of the Tx PDU which will be transmitted.			
PduIndoPtr	Pointer to a struct containing the properties of the Tx PDU.			
Return code				
Std_ReturnType	Returns if the transmit request was accepted.			
Functional Description				
Requests the transmission of the specified Tx PDU.				
Particularities and Limitations				
CAN Interface has to be initialized.				

Table 6-5 API CanIf\_Transmit

#### CanIf\_TxConfirmation 6.1.6

Prototype				
<pre>void CanIf_TxConfirmation(PduIdType CanTxPduId)</pre>				
Parameter				
CanTxPduId ID of the successfully transmitted PDU.				
Return code				
-	-			
Functional Description				
Confirms the successful transmission of a Tx PDU				
Particularities and Limitations				
CAN Interface has to be initialized.				

Table 6-6 API CanIf\_TxConfirmation



#### CanIf\_RxIndication 6.1.7

Prototype		
<pre>void CanIf_RxIndication(CanIf_HwHandleType Hrh, Can_IdType CanId, uint8 CanDlc, const uint8 *CanSduPtr)</pre>		
Parameter		
Hrh	Hardware handle the PDU was received in.	
CanId	CAN identifier of the received PDU.	
CanDlc	Data length code of the received PDU.	
CanSduPtr	Pointer to hardware or temporary buffer containing the data of the received PDU.	
Return code		
-	-	
Functional Description		
The CAN Driver notifies the CAN Interface about a received Rx PDU.		
Particularities and Limitations		
CAN Interface has to be initialized.		

API CanIf\_RxIndication Table 6-7

#### Canlf\_ControllerBusOff 6.1.8

Prototype		
void CanIf_ControllerBusOff(uint8 Controller)		
Parameter		
Controller	Affected controller.	
Return code		
-	-	
Functional Description		
Indicates a BusOff for the specified controller to the CAN Interface.		
Particularities and Limitations		
CAN Interface has to be initialized.		

Table 6-8 API Canlf\_ControllerBusOff



# 6.1.9 Canlf\_SetPduMode

Prototype		
Std_ReturnType CanIf_SetPduMode(uint8 ControllerId, CanIf_PduSetModeType PduModeRequest)		
Parameter		
ControllerId PduModeRequest	Controller which will be affected by the new Pdu mode. Requested Pdu mode	
Return code		
Std_ReturnType	Returns whether the state request was successful.	
Functional Description		
Change mode for specified controller. Possible states are:		
CANIF_SET_OFFLINE, CANIF_SET_RX_OFFLINE, CANIF_SET_RX_ONLINE, CANIF_SET_TX_OFFLINE, CANIF_SET_TX_ONLINE, CANIF_SET_TX_ONLINE, CANIF_SET_ONLINE, CANIF_SET_TX_OFFLINE ACTIVE		
Particularities and Limitations		
CAN Interface has to be initialized. Controller has to be in state CANIF CS STARTED.		

Table 6-9 API Canlf\_SetPduMode

# 6.1.10 Canlf\_GetPduMode

Prototype		
<pre>Std_ReturnType CanIf_GetPduMode(uint8 ControllerId, CanIf_PduGetModeType * PduModePtr)</pre>		
Parameter		
ControllerId	Request mode of the specified Controller.	
PduModePtr	Pointer to a data buffer the current mode will be stored in.	
Return code		
Std_ReturnType	Returns whether the request of the current state was successful.	
Functional Description		
Request the current mode of the specified controller.		
Particularities and Limitations		
CAN Interface has to be initialized.		

Table 6-10 API Canlf\_GetPduMode



# 6.1.11 CanIf\_InitMemory

Prototype		
void CanIf_InitMemory(void)		
Parameter		
-	-	
Return code		
-	-	
Functional Description		
Initializes global RAM variables, which have to be available before any call to the Canlf API.		
Particularities and Limitations		
May only be called once before CanIf_Init().		

Table 6-11 API Canlf\_InitMemory

# 6.1.12 CanIf\_CancelTxConfirmation

Prototype		
<pre>void CanIf_CancelTxconfirmation(PduIdType CanTxPduId, const Can_PduType *PduInfoPtr)</pre>		
Parameter		
CanTxPduId	Handle of the Tx PDU which was cancelled.	
PduInfoPtr	Contains information about cancelled PDU	
Return code		
-	-	
Functional Description		
Called by the CAN Driver to notify the CAN Interface about a cancelled PDU which has to be re-queued.		
Particularities and Limitations		
Only available if CANIF_TRANSMIT_CANCELLATION = STD_ON is set.		

Table 6-12 API CanIf\_CancelTxConfirmation



# 6.1.13 Canlf\_SetTrcvMode

Prototype		
StdReturnType CanIf_SetTrcvMode(uint8 TransceiverId, CanTrcv_TrcvModeType TransceiverMode)		
Parameter		
TransceiverId	Address the transceiver by a transceiver index.	
TransceiverMode	Requested mode transition	
Return code		
Std_ReturnType	Returns whether the state transition was successful.	
Functional Description		
Called by an upper layer to set the transceiver to another mode.		
Particularities and Limitations		
Only available if transceiver handling is activated at configuration time.  (CANIF_TRCV_HANDLING = STD_ON)		

Table 6-13 API Canlf\_SetTrcvMode

## 6.1.14 CanIf\_GetTrcvMode

Prototype		
StdReturnType CanIf_GetTrcvMode(CanTrcv_TrcvModeType *TransceiverModePtr, uint8 TransceiverId)		
Parameter		
TransceiverId	Address the transceiver by a transceiver index.	
TransceiverModePtr	Pointer to a buffer where current transceiver mode can be stored in.	
Return code		
Std_ReturnType	Returns whether the request of the current transceiver mode was successful.	
Functional Description		
Called by an upper layer to request the current mode of the transceiver.		
Particularities and Limitations		
Only available if (CANIF_TRCV_HANDLING =	· · · · · · · · · · · · · · · · · · ·	

Table 6-14 API Canlf\_GetTrcvMode



# 6.1.15 Canlf\_GetTrcvWakeupReason

Prototype		
StdReturnType CanIf_GetTrcvWakeupReason(uint8 TransceiverId, CanIf_TrcvWakeupReasonType *TrcvWuReasonPtr)		
Parameter		
TransceiverId	Address the transceiver by a transceiver index.	
TrcvWuReasonPtr	Pointer to a buffer where the transceiver's wake up reason can be stored in.	
Return code		
Std_ReturnType	Returns whether the request of the wake up reason was successful.	
Functional Description		
Called by an upper layer to request the wake up reason stored in the transceiver.		
Particularities and Limitations		
Only available if transceiver handling is activated at configuration time.  (CANIF_TRCV_HANDLING = STD_ON)		

Table 6-15 API Canlf\_GetTrcvWakeupReason

# 6.1.16 Canlf\_SetTrcvWakeupMode

Prototype		
StdReturnType CanIf_SetTrcvWakeupMode(uint8 TransceiverId, CanTrcv_TrcvWakeupModeType TrcvWakeupMode)		
Parameter		
TransceiverId	Address the transceiver by a transceiver index.	
TrcvWakeupMode	Enable, disable or clear notification for wake up events.	
Return code		
Std_ReturnType	Returns whether the requested mode was set successfully.	
Functional Description		
Called by an upper layer to enable, disable or clear the wake up event notification of the transceiver.		
Particularities and Limitations		
Only available if transceiver handling is activated at configuration time.  (CANIF_TRCV_HANDLING = STD_ON)		

Table 6-16 API Canlf\_SetTrcvWakeupMode



## 6.1.17 Canlf\_CheckWakeup

Prototype		
Std_ReturnType CanIf_CheckWakeup(EcuM_WakeupSourceType WakeupSource)		
Parameter		
WakeupSource	Wakeup source which identifies the possible wakeup source (Transceiver / CAN Controller)	
Return code		
Std_ReturnType	Returns whether the request to the Transceiver/ CAN Controller was successful.	
Functional Description		
Called by an upper layer to check if a transceiver or CAN controller recently raised a wakeup.		
Particularities and Limitations		
CAN Interface has to be initialized.		

Table 6-17 API Canlf\_CheckWakeup

## 6.1.18 Canlf\_CheckValidation

Prototype		
Std_ReturnType CanIf_CheckValidation(EcuM_WakeupSourceType WakeupSource)		
Parameter		
WakeupSource	Wakeup source which identifies the possible wakeup source (Transceiver / CAN Controller)	
Return code		
Std_ReturnType	Returns whether the requested mode was set successfully.	
Functional Description		
Called by an upper layer to check if a Rx message was received after a wake up occurred from one of the supported sources.		
If a message was received between the call of CanIf_CheckWakeup and CanIf_CheckValidation the configurable EcuM call back function EcuM_ValidationWakeupEvent is called from the context of this function.		
Particularities and Limitations		

CAN Interface has to be initialized.

CanIf\_CheckWakeup has to be called before and a wake up event has to be detected.

CAN Interface has to be set to CANIF CS STARTED mode before a validation is possible.

Table 6-18 API CanIf\_CheckValidation



# 6.1.19 Canlf\_ResetBusOffStart

Prototype		
void CanIf_ResetBusOffStart(uint8 ControllerId)		
Parameter		
ControllerId	Recover bus off for the specified controller	
Return code		
_	-	
Functional Description		
Initiates the bus off recovery for a specified channel.		
A call to CanIf_ResetBusOffEnd() has to follow on task level.		
Particularities and Limitations		
Non-Autosar compliant API function which has to be enabled by defining CANIF_BUSOFF_RECOVERY_API = STD ON		

Table 6-19 API Canlf\_ResetBusOffStart

# 6.1.20 Canlf\_ResetBusOffEnd

Prototype		
void CanIf_ResetBusOffEnd(uint8 ControllerId)		
Parameter		
ControllerId	Recover bus off for the specified controller	
Return code		
-	-	
Functional Description		
Finishes the bus off recovery for a specified channel.		
A call to CanIf_ResetBusOffStart() has to be executed before.		
Particularities and Limitations		
Non-Autosar compliant API function which has to be enabled by defining  CANIF_BUSOFF_RECOVERY_API = STD_ON		
The function has to be called on task level.		

Table 6-20 API Canlf\_ResetBusOffEnd

54



# 6.1.21 Canlf\_CancelTransmit

Prototype		
void CanIf_CancelTransmit (PduIdType CanTxPduId)		
Parameter		
CanTxPduId	Pduld of the message which has to be cancelled	
Return code		
-	-	
Functional Description		
Initiates the cancellation / suppression of the confirmation of a Tx message.		
Particularities and Limitations		
CAN Interface has to be initialized.		
AUTOSAR only defines a dummy function. For MICROSAR this function has the functionality to cancel an ordered Tx PDU. This API is provided only in case of CANIF_CANCEL_SUPPORT_API = STD_ON.		

Table 6-21 API CanIf\_CancelTransmit

# 6.1.22 CanIf\_CancelTxNotification

Prototype		
<pre>void CanIf_CancelTxNotification (PduIdType PduId, CanIf_CancelResultType IsCancelled)</pre>		
Parameter		
PduId	Id of the Tx message which was cancelled	
IsCancelled	Parameter currently not evaluated.	
Return code		
-	-	
Functional Description		
Called by the CAN Driver to notify about a cancelled message. No confirmation is raised for this message.		
Particularities and Limitations		
CAN Interface has to be initialized.		
Non-AUTOSAR compliant API function which is enabled in case of CANIF_CANCEL_SUPPORT_API = STD_ON.		

Table 6-22 API CanIf\_CancelTxNotification



# 6.1.23 Canlf\_SetDynamicTxld

Prototype		
<pre>void CanIf_SetDynamicTxId(PduIdType CanTxPduId, Can_IdType CanId)</pre>		
Parameter		
CanTxPduId	PDU ID of the Tx message	
CanId	CAN ID of the messageParameter	
Return code		
-	-	
Functional Description		
Called by the application to set the CAN Id of the corresponding Tx PDU.		
Particularities and Limitations		
CAN Interface has to be initialized.		
Shall not be interrupted by a call of CanIf_Transmit() for the same Tx PDU.		

Table 6-23 API Canlf\_SetDynamicTxld

# 6.1.24 Canlf\_ControllerModeIndication

Prototype		
<pre>void CanIf_ControllerModeIndication(uint8 Controller, CanIf_ControllerModeType ControllerMode)</pre>		
Parameter		
Controller ControllerMode	Channel where the mode transition happened Controller mode to which the CAN controller transitioned	
Return code		
-	-	
Functional Description		
Called by the CAN driver to notify about successful controller mode transition		
Particularities and Limitations		
CAN Interface has to be initialized.		

Table 6-24 API Canlf\_ControllerModeIndication



# 6.1.25 CanIf\_TrcvModeIndication

Prototype		
void CanIf_TrcvModeIndication(uint8 TransceiverId, CanTrcv_TrcvModeType TransceiverMode)		
Parameter		
TransceiverId	Transceiver where the mode transition happened	
TransceiverMode	Transceiver mode to which the transceiver transitioned	
Return code		
-	-	
Functional Description		
Called by the transceiver driver to notify about successful transceiver mode transition		
Particularities and Limitations		
CAN Interface has to be initialized.		

Table 6-25 API Canlf\_TrcvModeIndication

# 6.1.26 Canlf\_ConfirmPnAvailability

Prototype		
<pre>void CanIf_ConfirmPnAvailability(uint8 TransceiverId)</pre>		
Parameter		
TransceiverId	CAN transceiver, which was checked for PN availability	
Return code		
-	-	
Functional Description		
This service indicates that the transceiver is running in PN communication mode		
Particularities and Limitations		
This API is only available in case of CANIF_PN_TRCV_HANDLING = STD_ON.		

Table 6-26 API Canlf\_ConfirmPnAvailability



# 6.1.27 Canlf\_ClearTrcvWufFlagIndication

Prototype		
void CanIf_ClearTrcvWufFlagIndication(uint8 TransceiverId)		
Parameter		
TransceiverId	CAN transceiver, for which the API was called	
Return code		
-	-	
Functional Description		
This service indicates that the transceiver has cleared the WufFlag.		
Particularities and Limitations		
CanIf_Init() has already been called and all transceiver driver have been initialized.  This API is only available in case of CANIF PN TRCV HANDLING = STD ON.		

Table 6-27 API Canlf\_ClearTrcvWufFlagIndication

# 6.1.28 Canlf\_CheckTrcvWakeFlagIndication

Prototype		
void CanIf_CheckTrcvWakeFlagIndication(uint8 TransceiverId)		
Parameter		
TransceiverId	CAN transceiver, for which the API was called	
Return code		
-	-	
Functional Description		
This service indicates the reason for the wake up that the CAN transceiver has detected		
CanIf Init() has already been called and all transceiver driver have been initialized.		
This API is only available in case of CANIF_PN_TRCV_HANDLING = STD_ON.		

Table 6-28 API Canlf\_CheckTrcvWakeFlagIndication



# 6.1.29 Canlf\_SetBaudrate

Prototype			
Std_ReturnType CanIf_SetBaudrate(uint8 ControllerId, uint16 BaudRateConfigID)			
Parameter	Parameter		
ControllerId BaudRateConfigID	Abstracted Canlf ControllerId which is assigned to a CAN References a baud rate configuration by ID		
Return code			
E_OK E_NOT_OK	Service request accepted, baudrate change started. Service request not accepted.		
Functional Description			
This service shall set the baud rate configuration of the CAN controller.			
Particularities and Limitations			
CAN Interface has to be initialized. This API is provided in case of			
CANIF_SET_BAUDRATE_API = STD_ON.			

Table 6-29 API Canlf\_SetBaudrate

# 6.1.30 Canlf\_ChangeBaudrate

Prototype		
Std_ReturnType CanIf_ChangeBaudrate(uint8 ControllerId, const uint16 Baudrate)		
Parameter		
ControllerId Baudrate	The Controller the Baudrate shall be changed for Baudrate to which shall be changed	
Return code		
E_OK E_NOT_OK	Service request accepted, change started Service request not accepted	
Functional Description		
This service changes the baudrate of the CAN controller		
Particularities and Limitations		
CAN Interface has to be initialized. This API is provided in case of CANIF_CHANGE_BAUDRATE_SUPPORT = STD_ON.		

Table 6-30 API Canlf\_ChangeBaudrate



# 6.1.31 CanIf\_ChangeBaudrate

Prototype		
Std_ReturnType CanIf_	ChangeBaudrate(uint8 ControllerId, const uint16 Baudrate)	
Parameter		
ControllerId Baudrate	The Controller the Baudrate shall be changed for Baudrate to which shall be changed	
Return code		
E_OK	Service request accepted, change started	
E_NOT_OK	Service request not accepted	
Functional Description		
This service changes the baudrate of the CAN controller		
Particularities and Limitations		
CAN Interface has to be initialized. This API is provided in case of CANIF_CHANGE_BAUDRATE_SUPPORT = STD_ON.		

Table 6-31 API Canlf\_ChangeBaudrate

# 6.1.32 Canlf\_GetTxConfirmationState

Prototype	
CanIf_NotifStatusType CanI:	f_GetTxConfirmationState (uint8 ControllerId)
Parameter	
ControllerId	Controller to be checked
Return code	
CANIF_NO_NOTIFICATION	No transmit event occurred for requested CAN Controller
CANIF_TX_RX_NOTIFICATION	The CAN Controller has successfully transmitted any message
Functional Description	
This service reports, if any TX confirmation has been done for the whole CAN controller since the last CAN controller start.	
Particularities and Limitations	
CAN Interface has to be initialized. This API is provided in case of  CANIF PUBLIC TX CONFIRM POLLING SUPPORT = STD ON.	

Table 6-32 API CanIf\_GetTxConfirmationState



# 6.1.33 Canlf\_SetAddressTableEntry

Prototype	
<pre>void CanIf_SetAddre: busAddr)</pre>	ssTableEntry (uint8 ControllerId, uint8 intAddr, uint8
Parameter	
ControllerId intAddr busAddr	The channel at which a J1939 address shall be set. J1939 internal address. J1939 bus address.
Return code	
-	-
Functional Description	
The service will be called to describe the relation between internal and external ID. Only used in J1939 environment.	
Particularities and Limitations	
CAN Interface has to be initialized. This API is provided in case of	
CANIF J1939 DYN ADDR SUPPORT != CANIF J1939 DYN ADDR DISABLED.	

Table 6-33 API CanIf\_SetAddressTableEntry

# 6.1.34 Canlf\_ResetAddressTableEntry

Prototype	
void CanIf_ResetAddressTableEntry (uint8 ControllerId, uint8 intAddr)	
Parameter	
ControllerId intAddr	The channel at which a J1939 internal address shall be reset. J1939 internal address.
Return code	
-	-
Functional Description	
The service will be called to reset the relation between internal and external ID. Only used in J1939 environment.	
Particularities and Limitations	
CAN Interface has to be initialized. This API is provided in case of	
CANIF J1939 DYN ADDR SUPPORT != CANIF J1939 DYN ADDR DISABLED.	

Table 6-34 API Canlf\_ResetAddressTableEntry



# 6.1.35 Canlf\_RamCheckExecute

Prototype	
void CanIf_RamCheckExecute (uint8 ControllerId)	
Parameter	
ControllerId	The CAN-channel for which the RAM-check shall be executed.
Return code	
-	-
Functional Description	
This service requests an underlying CAN-channel to execute the RAM-check of CAN-controller-HW-registers.	
Particularities and Limitations	
CAN Interface has to be initialized. This API is provided in case of	
CANIF EXTENDED RAM CHECK SUPPORT == STD ON.	

Table 6-35 API Canlf\_RamCheckExecute

# 6.1.36 Canlf\_RamCheckEnableMailbox

Prototype	
<pre>void CanIf_RamCheckEnableMailbox (uint8 ControllerId, CanIf_HwHandleType HwHandle)</pre>	
Parameter	
ControllerId HwHandle	The CAN-channel to which the mailbox ( <hwhandle>) belongs to.  The mailbox which shall be enabled.</hwhandle>
Return code	
-	-
Functional Description	
This service requests an underlying CAN-channel to enable a mailbox.	
Particularities and Limitations	
CAN Interface has to be initialized. This API is provided in case of	
CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON.	

Table 6-36 API CanIf\_RamCheckEnableMailbox



# 6.1.37 Canlf\_RamCheckEnableController

Prototype	
void CanIf_RamCheckEr	nableController (uint8 ControllerId)
Parameter	
ControllerId	The CAN-channel which shall be enabled.
Return code	
_	-
Functional Description	
This service requests to enable an underlying CAN-channel.	
Particularities and Limitations	
CAN Interface has to be initialized. This API is provided in case of	
CANIF EXTENDED RAM CHECK SUPPORT == STD ON.	

Table 6-37 API Canlf\_RamCheckEnableController

# 6.1.38 Canlf\_RamCheckCorruptMailbox

Prototype		
<pre>void CanIf_RamCheckCorruptMailbox (uint8 ControllerId, CanIf_HwHandleType HwHandle)</pre>		
Parameter		
ControllerId HwHandle	The CAN-channel to which the corrupt mailbox ( <hwhandle>) belongs to. The corrupt mailbox.</hwhandle>	
Return code		
_	-	
Functional Description		
This service indicates about a corrupt mailbox.		
Particularities and Limitations		
This service may be used also if CAN Interface is NOT initialized. This API is provided in case of		
CANIF_EXTENDED_RAM_CHECK_SUPPORT == STD_ON.		

Table 6-38 API Canlf\_RamCheckCorruptMailbox



# 6.1.39 Canlf\_RamCheckCorruptController

Prototype		
void CanIf_RamCheckCo	rruptController (uint8 ControllerId)	
Parameter		
ControllerId	The corrupt CAN-channel.	
Return code		
_	-	
Functional Description		
This service indicates about a corrupt CAN-channel.		
Particularities and Limitations		
This service may be used also if CAN Interface is NOT initialized. This API is provided in case of		
CANIF EXTENDED RAM CHECK SUPPORT == STD ON.		

Table 6-39 API Canlf\_RamCheckCorruptController

# 6.1.40 CanIf\_SetPduReceptionMode

Prototype	
<pre>Std_ReturnType CanIf_ mode)</pre>	SetPduReceptionMode (PduIdType id, CanIf_ReceptionModeType
Parameter	
id	The identifier of Rx-PDU whose reception mode shall be changed.
mode	The reception mode which shall be set. Following reception modes are possible:
	1) CANIF_RMT_IGNORE_CONTINUE: In case of a match the received Rx-PDU is not forwarded to configured upper layer and the search for a potential match continues.
	2) CANIF_RMT_RECEIVE_STOP: In case of a match the received Rx-PDU is forwarded to configured upper layer.
Return code	
E_OK E_NOT_OK	Service request accepted, reception mode was changed Service request not accepted, reception mode was not changed
Functional Description	
Via this API the reception mo	de of a Rx-PDU can be set.
Particularities and Limitation	ons
	alized. During the initialization the reception mode of all affected Rx-PDUs is set _STOP. This API is provided in case of
CANIF_SET_PDU_RECEP	TION_MODE_SUPPORT == STD_ON.

Table 6-40 API Canlf\_SetPduReceptionMode



#### 6.2 Callout Functions

#### 6.2.1 EcuM\_BswErrorHook

Prototype	
void EcuM_BswErrorHook(uint16 CanIfModuleId, uint8 CanIfInstanceId)	
Parameter	
CanIfModuleId	Contains the CANIF_MODULE_ID (60) as defined by AUTOSAR.
CanIfInstanceId	For the Canlf only one instance is available, so this value is always zero.
Return code	
None	

#### **Functional Description**

Called once by the Canlf during the initialization phase to indicate one of the following possible errors:

- Abort initialization as generator is not compatible

## Particularities and Limitations

None

Call Context

This function is called in context of CanIf\_Init().

Table 6-41 EcuM\_BswErrorHook

#### 6.2.2 CanIf\_RxIndicationSubDataChecksumRxVerify

## 

Return code	
E_OK	Verification of checksum passed. In this case the Rx-PDU is forwarded to upper layer.
E_NOT_OK	Verification of checksum failed. In this case the Rx-PDU is discarded and NOT forwarded to upper layer.

#### **Functional Description**

API called by Canlf in case of a data checksum PDU was received in order to verify its correctness.

#### **Particularities and Limitations**

This API is called only if CANIF DATA CHECKSUM RX SUPPORT == STD ON.

#### Call Context

This function is called in context of CanIf RxIndication().



## 6.2.3 Canlf\_TransmitSubDataChecksumTxAppend

#### Prototype

void CanIf\_TransmitSubDataChecksumTxAppend (const Can\_PduType
\*txPduInfoPtr, uint8 \*txPduDataWithChecksumPtr)

Parameter		
txPduInfoPtr	Pointer to Tx-PDU-parameters: CAN identifier, data length, data.	
txPduDataWithChecksu mPtr	Pointer to data buffer where the data of Tx-PDU incl. the checksum shall be stored in. The data checksum PDU is transmitted with data stored in this buffer.	
	Note: Parameter "txPduDataWithChecksumPtr" may only be written with index >= 0 and < CANIF_CFG_MAXTXDLC_PLUS_DATACHECKSUM (see file CanIf_Cfg.h). The length of data can not be changed hence the checksum must only be added within valid data-length of the Tx-PDU which is given by range: 0 - (txPduInfoPtr->length - 1).	

#### Return code

None

#### **Functional Description**

API called by CanIf before transmission of a data checksum Tx-PDU in order to add a checksum to its data.

#### **Particularities and Limitations**

This API is called only if CANIF\_DATA\_CHECKSUM\_TX\_SUPPORT == STD\_ON.

#### Call Context

This function is called in context of CanIf Transmit().



## 7 AUTOSAR Standard Compliance

Following restrictions apply to the current CAN Interface implementation.

#### 7.1 Not supported AUTOSAR features

The following features which are specified by the AUTOSAR CAN Interface SWS ([1]) are not supported.

#### 7.1.1 Tx notification status

This feature is specified by the requirements: CANIF202, CANIF393, CANIF472, CANIF331, CANIF391, CANIF334, CANIF335, CANIF609 Conf and CANIF589 Conf.

#### 7.1.2 Rx notification status

This feature is specified by the requirements: CANIF230, CANIF336, CANIF339, CANIF340, CANIF392, CANIF394, CANIF473, CANIF595 Conf and CANIF608 Conf.

#### 7.1.3 Rx buffer

This feature is specified by the requirements: CANIF194, CANIF198, CANIF199, CANIF324, CANIF325, CANIF326, CANIF330, CANIF329, CANIF600\_Conf and CANIF607 Conf.

#### 7.2 Deviations

#### 7.2.1 Tx buffer

At least and at most one Tx buffer is supported per each BasicCAN-Tx-PDU. Hence no configuration can be performed by the user as intended by the attribute CanIfBufferSize.

#### 7.2.2 Partial networking

Against the requirement CANIF749 the Partial Networking Wakeup Tx Pdu Filter is enabled only if the PDU mode of CAN Interface is set either to mode CANIF\_GET\_TX\_ONLINE\_WU\_FILTER or to mode CANIF\_GET\_ONLINE\_WU\_FILTER.

#### 7.2.3 AUTOSAR version check

The CAN Interface does not perform AUTOSAR release version check in accordance with other modules because the version check is not specified by AUTOSAR clearly.

#### 7.3 Limitations

The priority of a dynamic Tx-PDU is determined from the initial configured CAN identifier and not from the CAN identifier set by using the API <code>CanIf\_SetDynamicTxId()</code>.



# 8 Glossary and Abbreviations

# 8.1 Glossary

Term	Description
DaVinci Configurator 5	Configuration and generation tool for MICROSAR software components

Table 8-1 Glossary

# 8.2 Abbreviations

Abbreviation API Application Programming Interface AUTOSAR Automotive Open System Architecture BSW Basis Software CanNm CAN Network Manager CanSM CAN State Manager CanTrp CAN Transport Protocol CanTrcv CAN Interface Controller Mode State Machine (for one controller) CDD Complex Device Driver COMM Communication Manager DEM Diagnostic Event Manager DET Development Error Tracer DLC Data Length Code ECU Electronic Control Unit EcuM ECU State Manager FD Flexible Data-rate FIFO First In First Out HRH Hardware Receive Handle HTH Hardware Transmit Handle HW Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PSRS Software Requirement Specification SWC Software Component		
AUTOSAR Automotive Open System Architecture  BSW Basis Software  CanNm CAN Network Manager  CanSM CAN State Manager  CanTp CAN Transport Protocol  CanTrcv CAN Interface Controller Mode State Machine (for one controller)  CDD Complex Device Driver  ComM Communication Manager  DEM Diagnostic Event Manager  DET Development Error Tracer  DLC Data Length Code  ECU Electronic Control Unit  EcuM ECU State Manager  FIPO Flexible Data-rate  FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	Abbreviation	Description
BSW Basis Software CanNm CAN Network Manager CanSM CAN State Manager CanTp CAN Transport Protocol CanTrcv CAN Interface Controller Mode State Machine (for one controller) CDD Complex Device Driver ComM Communication Manager DEM Diagnostic Event Manager DET Development Error Tracer DLC Data Length Code ECU Electronic Control Unit EcuM ECU State Manager FD Flexible Data-rate FIFO First In First Out HRH Hardware Receive Handle HTH Hardware Transmit Handle HW Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PduR PDU Router SchM Schedule Manager SDU Service Data Unit SRS Software Requirement Specification	API	Application Programming Interface
CanNm CAN Network Manager CanSM CAN State Manager CanTp CAN Transport Protocol CanTrcv CAN Transceiver CCMSM CAN Interface Controller Mode State Machine (for one controller) CDD Complex Device Driver ComM Communication Manager DEM Diagnostic Event Manager DET Development Error Tracer DLC Data Length Code ECU Electronic Control Unit EcuM ECU State Manager FD Flexible Data-rate FIFO First In First Out HRH Hardware Receive Handle HTH Hardware Transmit Handle HW Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PduR PDU Router SchM Schedule Manager SDU Service Data Unit SRS Software Requirement Specification	AUTOSAR	Automotive Open System Architecture
CanSM CAN State Manager CanTp CAN Transport Protocol CanTrcv CAN Transceiver CCMSM CAN Interface Controller Mode State Machine (for one controller) CDD Complex Device Driver ComM Communication Manager DEM Diagnostic Event Manager DET Development Error Tracer DLC Data Length Code ECU Electronic Control Unit EcuM ECU State Manager FD Flexible Data-rate FIFO First In First Out HRH Hardware Receive Handle HTH Hardware Transmit Handle HW Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PduR PDU Router SchM Schedule Manager SDU Service Data Unit SRS Software Requirement Specification	BSW	Basis Software
CanTp CAN Transport Protocol CanTrcv CAN Interface Controller Mode State Machine (for one controller) CDD Complex Device Driver ComM Communication Manager DEM Diagnostic Event Manager DET Development Error Tracer DLC Data Length Code ECU Electronic Control Unit EcuM ECU State Manager FD Flexible Data-rate FIFO First In First Out HRH Hardware Receive Handle HTH Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PduR PDU Router SCH Software Requirement Specification	CanNm	CAN Network Manager
CanTrov CAN Transceiver CCMSM CAN Interface Controller Mode State Machine (for one controller) CDD Complex Device Driver ComM Communication Manager DEM Diagnostic Event Manager DET Development Error Tracer DLC Data Length Code ECU Electronic Control Unit EcuM ECU State Manager FD Flexible Data-rate FIFO First In First Out HRH Hardware Receive Handle HTH Hardware Transmit Handle HW Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PduR PDU Router SchM Schedule Manager SDU Service Data Unit SRS Software Requirement Specification	CanSM	CAN State Manager
CCMSM CAN Interface Controller Mode State Machine (for one controller)  CDD Complex Device Driver  ComM Communication Manager  DEM Diagnostic Event Manager  DET Development Error Tracer  DLC Data Length Code  ECU Electronic Control Unit  EcuM ECU State Manager  FD Flexible Data-rate  FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SCHM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	CanTp	CAN Transport Protocol
CDD Complex Device Driver  ComM Communication Manager  DEM Diagnostic Event Manager  DET Development Error Tracer  DLC Data Length Code  ECU Electronic Control Unit  EcuM ECU State Manager  FD Flexible Data-rate  FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	CanTrcv	CAN Transceiver
ComM Communication Manager DEM Diagnostic Event Manager DET Development Error Tracer DLC Data Length Code ECU Electronic Control Unit EcuM ECU State Manager FD Flexible Data-rate FIFO First In First Out HRH Hardware Receive Handle HTH Hardware Transmit Handle HW Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PduR PDU Router SchM Schedule Manager SDU Service Data Unit SRS Software Requirement Specification	CCMSM	CAN Interface Controller Mode State Machine (for one controller)
DEM Diagnostic Event Manager DET Development Error Tracer DLC Data Length Code ECU Electronic Control Unit EcuM ECU State Manager FD Flexible Data-rate FIFO First In First Out HRH Hardware Receive Handle HTH Hardware Transmit Handle HW Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PduR PDU Router SchM Schedule Manager SDU Service Data Unit SRS Software Requirement Specification	CDD	Complex Device Driver
DET Development Error Tracer  DLC Data Length Code  ECU Electronic Control Unit  EcuM ECU State Manager  FD Flexible Data-rate  FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	ComM	Communication Manager
DLC Data Length Code  ECU Electronic Control Unit  EcuM ECU State Manager  FD Flexible Data-rate  FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	DEM	Diagnostic Event Manager
ECU Electronic Control Unit  EcuM ECU State Manager  FD Flexible Data-rate  FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	DET	Development Error Tracer
EcuM ECU State Manager  FD Flexible Data-rate  FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	DLC	Data Length Code
FD Flexible Data-rate  FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	ECU	Electronic Control Unit
FIFO First In First Out  HRH Hardware Receive Handle  HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	EcuM	ECU State Manager
HRH Hardware Receive Handle HTH Hardware Transmit Handle HW Hardware ISR Interrupt Service Routine MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution) PDU Protocol Data Unit PduR PDU Router SchM Schedule Manager SDU Service Data Unit SRS Software Requirement Specification	FD	Flexible Data-rate
HTH Hardware Transmit Handle  HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	FIFO	First In First Out
HW Hardware  ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	HRH	Hardware Receive Handle
ISR Interrupt Service Routine  MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	HTH	Hardware Transmit Handle
MICROSAR Microcontroller Open System Architecture (the Vector AUTOSAR solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	HW	Hardware
solution)  PDU Protocol Data Unit  PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	ISR	Interrupt Service Routine
PduR PDU Router  SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	MICROSAR	
SchM Schedule Manager  SDU Service Data Unit  SRS Software Requirement Specification	PDU	Protocol Data Unit
SDU Service Data Unit SRS Software Requirement Specification	PduR	PDU Router
SRS Software Requirement Specification	SchM	Schedule Manager
·	SDU	Service Data Unit
SWC Software Component	SRS	Software Requirement Specification
	SWC	Software Component



SWS Software Specification	
----------------------------	--

Table 8-2 Abbreviations



# 9 Contact

Visit our website for more information on

- > News
- > Products
- > Demo software
- > Support
- > Training data
- > Addresses

www.vector-informatik.com